

Shared XDM Specification

Historic Version 1.0.1 – 28 Nov 2006

Open Mobile Alliance OMA-TS-XDM_Shared-V1_0_1-20061128-H

Use of this document is subject to all of the terms and conditions of the Use Agreement located at http://www.openmobilealliance.org/UseAgreement.html.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile AllianceTM specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the "OMA IPR Declarations" list at http://www.openmobilealliance.org/ipr.html. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE "OMA IPR DECLARATIONS" LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2006 Open Mobile Alliance Ltd. All Rights Reserved. Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

Contents

1.	SCOPE		4
2.	REFER	ENCES	5
2	2.1 No	RMATIVE REFERENCES	5
2		FORMATIVE REFERENCES	
3.	TERM	NOLOGY AND CONVENTIONS	6
3		NVENTIONS	
		FINITIONS	
3	3.3 AB	BREVIATIONS	6
4.	INTRO	DUCTION	7
5.	SHARI	D XDM APPLICATION USAGES	8
5	5.1 UF	II LIST	8
	5.1.1	Structure	
	5.1.2	Application Unique ID	
	5.1.3 5.1.4	Default Namespace	
	5.1.4	MIME Type	
	5.1.6	Validation constraints	
	5.1.7	Data Semantics	
	5.1.8	Naming conventions	
	5.1.9	Global documents	
	5.1.10	Resource interdependencies	
_	5.1.11	Authorization policies	
5		OUP USAGE LIST	
	5.2.1 5.2.2	StructureApplication Unique ID	
	5.2.3	Default Namespace	
	5.2.4	XML Schema	
	5.2.5	MIME Type	
	5.2.6	Validation constraints	
	5.2.7	Data Semantics	
	5.2.8	Naming conventions	
	5.2.9	Global documents	
	5.2.10 5.2.11	Resource interdependencies Authorization policies	
6.		RIBING TO CHANGES IN THE XML DOCUMENTS	
	PENDIX	, , , , , , , , , , , , , , , , , , , ,	
		ARED XDM APPLICATION USAGES (SERVER)ARED XDM APPLICATION USAGES (CLIENT)	
	v.z sh PENDIX	· · · · · · · · · · · · · · · · · · ·	
		ANIPULATING URI LISTS	
1	B.1.1	Obtaining URI Lists	
	B.1.2	Obtaining Group Usage Lists	
AP	PENDIX		
		PROVED VERGION HIGTORY	10

1. Scope

This specification describes the data format and XCAP application usage for the shared document, URI List, which can be used by all OMA enablers.

2. References

2.1 Normative References

[XDM RD] "XML Document Management Requirements", Version 1.0, Open Mobile Alliance™, OMA-

RD-XDM-V1 0, URL: http://www.openmobilealliance.org/

[XSD APPUSAGE] "XDM Resource List Elements – appusage", Version 1.0, Open Mobile Alliance™, OMA-

SUP-XSD xdm rsrclist appusage-V1 0, URL; http://www.openmobilealliance.org/

[XSD URIUSAGE] "XDM Resource List Elements – uriusage", Version 1.0, Open Mobile Alliance™, OMA-SUP-

XSD xdm rsrclist uriusage-V1 0, URL: http://www.openmobilealliance.org/

"Key words for use in RFCs to Indicate Requirement Levels", S. Bradner, March 1997, URL: [RFC2119]

http://www.ietf.org/rfc/rfc2119.txt

[RFC2234] "Augmented BNF for Syntax Specifications: ABNF". D. Crocker, Ed., P. Overell. November

1997, URL: http://www.ietf.org/rfc/rfc2234.txt

[XCAP] "The Extensible Markup Language (XML) Configuration Access protocol (XCAP)", J.

Rosenberg, May 5, 2006, URL: http://www.ietf.org/internet-drafts/draft-ietf-simple-xcap-12.txt

Note: IETF Draft Work in progress

[XCAP List] "Extensible Markup Language (XML) Formats for Representing Resource Lists", J. Rosenberg,

February 7, 2005, URL: http://www.ietf.org/internet-drafts/draft-ietf-simple-xcap-list-usage-

05.txt

Note: IETF Draft Work in progress

[XDM_Spec] "XML Document Management (XDM) Specification", Version 1.0.1, Open Mobile AllianceTM,

OMA-TS-XDM Core-V1 0 1, URL:http://www.openmobilealliance.org/

2.2 Informative References

[OMNA ListUsageNa Open Mobile Naming Authority URI-List Usage Name Registry, Open Mobile AllianceTM, mes] http://www.openmobilealliance.org/tech/omna/OMNA-URI-ListUsageNames-registry.htm

[PoC XDM] "PoC XDM Specification", Version 1.0.1, Open Mobile Alliance™, OMA-TS-POC XDM-

V1 0 1, URL:http://www.openmobilealliance.org/

[RLS XDM] "Resource List Service (RLS) XDM Specification", Version 1.0.1, Open Mobile AllianceTM,

OMA-TS-Presence_SIMPLE_RLS_XDM-V1 0 1, <u>URL:http://www.openmobilealliance.org/</u>

3. Terminology and Conventions

3.1 Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except "Scope" and "Introduction", are normative, unless they are explicitly indicated to be informative.

3.2 Definitions

Global document A document placed under the XCAP global tree that applies to all users of that application usage.

Global tree A URL that represents the parent for all global documents for a particular application usage within a

particular XCAP root. (Source: [XCAP])

XCAP Application

Usage Detailed information on the interaction of an application with an XCAP server. (Source: [XCAP])

XCAP Server An HTTP server that understands how to follow the naming and validation constraints defined in this

specification. (Source: [XCAP])

3.3 Abbreviations

AUID Application Unique ID

HTTP Hypertext Transfer Protocol

IETF Internet Engireering Task Force

OMA Open Mobile Alliance

OMNA Open Mobile Naming Authority

TLS Transport Layer Security
URI Uniform Resource Identifier

XCAP XML Configuration Access Protocol

XDM XML Document Management
XML Extensible Markup Language

4. Introduction

This specification, which is a part of the XML Document Management enabler, describes a particular type of list, the URI List, which is a convenient way for a principal to group together a number of URIs (e.g., as "Friends", "Family" etc.) or other resources, where such a list is expected to be reused for a number of different services. Such a list is not enabler-specific and can be re-used wherever a principal has a need to collectively refer to a group of other end users or resources. For example, the reference to a list of "Friends" can be an entry in a PoC Group member list (see [PoC_XDM] for details), or be included in a Presence List (see [RLS_XDM] for details).

This specification provides the data schema and application usage of a URI List and Group Usage List. It reuses the document structure "resource-lists" described in IETF [XCAP List].

5. Shared XDM Application Usages

5.1 URI list

5.1.1 Structure

The URI List document SHALL conform to the structure of the "resource-lists" document described in [XCAP_List] Section 3 with the following extension:

• The <appusages> child element of the list> element defines the applications which use this list. The <appusages> element contains the node URI and the AUID value of those application usages referring to the list> element.

Note:It is recommended that the <entry-ref> element defined in [XCAP_List] not be used as it may create extra roundtrips between an XDM client and an XDM server when resolving a URI-list.

5.1.2 Application Unique ID

The URI List SHALL conform to the AUID for "resource-lists" defined in [XCAP List] Section 3.4.1.

5.1.3 Default Namespace

The default namespace SHALL conform to the default namespace "urn:ietf:params:xml:ns:resource-lists" for the "resource-lists" document described in [XCAP List].

5.1.4 XML Schema

The URI List document SHALL conform to the XML schema for the "resource-lists" document described in [XCAP_List] Section 3.4.3 with the following extension described in [XSD_APPUSAGE].

5.1.5 MIME Type

The URI List SHALL conform to the MIME type "application/resource-lists+xml" defined in [XCAP List] Section 3.4.2.

5.1.6 Validation constraints

In addition to the XML schema, the additional validation constraints on a URI List SHALL conform to those described in [XCAP_List] Section 3.4.5, with the following clarifications:

The "name" attribute of the list> element SHALL be present.

Therefore, if XDM Client proposes a creation of list> element without its "name" attribute, an HTTP "409 Conflict" response SHALL be returned with the error condition identified by the <constraint-failure> element. If included, the "phrase" attribute of this element SHOULD be set "Name attribute is required."

Note: It is noted that the value of the "name" attribute of list> element shall also conform to the uniqueness constraints as specified in [XCAP_List] Section 3.4.5.

The <appusages> element MAY be present as a child element to the list> element. If present, the element SHALL be inserted after the child elements as defined by the resource-lists namespace as the place for its extension.

5.1.7 Data Semantics

The data semantics for a URI List SHALL conform to those described in [XCAP_List] Section 3.4.5 with the following extension:

• The <appusages> element SHALL be used to store which other application usages that has a reference to this URI list. The <nodeuri> child element SHALL be used to store a reference to such an application usage. The attribute "uri" of this element SHALL contain a node URI as defined in [XCAP] to the document containing the reference. The attribute "auid" SHALL contain an Application Unique ID [XCAP] defined for the application usage that has the reference. XDM clients MAY insert a <nodeuri> element when inserting a reference to a URI List in any other application usage document.

Note:XDM clients that are using an application usage that has a reference to a URI list are recommended to check that the <appusages> element contains a <nodeuri> element with information about used application usage. If a client finds that such an element is not included the client is recommended to insert a <nodeuri> element with information about the application usage in order to keep the information up to date.

5.1.8 Naming conventions

The naming conventions for a URI List SHALL conform to those described in [XCAP_List] Section 3.4.7.

The XDMC SHALL use a single file for all shared URI Lists for a particular user. The file name SHALL be "index".

A XDMC may have a need to store a URI-List that has one well defined usage. A user can only have one list of this type. The "name" attribute of the list> element is used to indicate the usage. The syntax used SHALL be a string of the format "oma_xyz where xyz is a string containing letters a to z. The naming convension SHALL only be used in a element that is a child element to the root element <re>resource-lists></re>. This specification defines the following name attributes:

- oma_allcontacts: This name SHALL be used by an XDMC that has a need to store all users URI:s, that it knows about, in one list independent of how the URI:s are used.
- oma_buddylist: This name SHALL be used by an XDMC that has a need to store all users URI:s, that it wants to use for all types of communication, in one list.
- oma_pocbuddylist: This name SHALL be used by an XDMC that has a need to store users URI:s, that it wants to use for PoC communication, in one list.
- oma_blockedcontacts. This name SHALL be used by a XDMC that has a need to store URI:s to users, that it want to block/reject in a number of application usages, in one list.

Enablers that needs to define other types of usage can do this in their enabler specification as long as they are following the syntax above and make sure that no other enabler is using the same "xyz" string.

A listing of all URI List usage names are maintained on the OMNA URI-List Usage Name Registry [OMNA ListUsageNames].

The "name" attribute of a st> element SHALL be present for referencing by other resources using <external> element. The value of "name" attribute of a element SHALL be unique amongst all other elements within the same parent element (as specified in [XCAP List] Section 3.1)

5.1.9 Global documents

This application usage defines no global documents.

5.1.10 Resource interdependencies

The value of "name" attribute of a st> element SHALL NOT be changed during the existence of the corresponding element. This is because a modification to the value of "name" attribute of the element would need all subsequent updates against wherever the element is referred by other resources using <external> element. Otherwise, the reference would be broken.

5.1.11 Authorization policies

The authorization policies for manipulating a URI List SHALL conform to those described in [XDM_Spec] Section 6.4.3.

5.2 Group Usage List

This section specifies a new application Group Usage List, a list of group names or service URIs that are known by the XCAP Client. The feature MAY be supported.

5.2.1 Structure

The URL List document SHALL conform to the structure of the "resource-lists" document described in [XCAP_List] Section 3 with the following difference:

- 1. Extensions on "uriusage" element in <entry> element from "urn:oma:xml:xdm:resource-list:oma-uriusage" namespace defines used uri type. Element "uriusage" is an abstract type. The <uriusage> element is not application specific. Each application can define their specific uri usages in their specifications.
- 2. Prohibition of using <external> and <entry-ref> so as to avoid complexity.

5.2.2 Application Unique ID

The AUID SHALL be org.openmobilealliance.group-usage-list.

5.2.3 Default Namespace

The default namespace SHALL conform to the default namespace "urn:ietf:params:xml:ns:resource-lists" for the "resource-lists" document described in [XCAP_List].

5.2.4 XML Schema

The Group Usage List document SHALL conform to the XML schema for the "resource-lists" document described in [XCAP List] Section 3.4.3 with the extension described in [XSD URIUSAGE].

5.2.5 MIME Type

The MIME type SHALL be "application/vnd.oma.group-usage-list+xml".

5.2.6 Validation constraints

In addition to the XML schema, the additional validation constraints on a Group Usage List SHALL conform to those described in [XCAP_List] Section 3.4.4.

If the XDMC uses or adds an <entry-ref> or <external> element (specified in [XCAP_List]) under the list> element, to refer to any storage of a PoC Contact Address in the Shared XDMS, the PoC XDMS comply with this specification SHALL return an error code "409 **Conflict"** response which includes the XCAP error element <constraint-failure>. If included, the "phrase" attribute SHOULD be set to "Not allowed".

5.2.7 Data Semantics

The data semantics for a Group Usage List SHALL conform to those described in [XCAP_List] Section 3.4.5 with the following extensions:

The <uriusage> element SHALL be used to indicate what that the "uri" attribute of the <entry> element is used for. The <uriusage> element is not application specific. Each application can define their specific uri usages in their specifications.

5.2.8 Naming conventions

The XDMC MAY use a single file for all group names or service URIs. Every group name or service URI is defined in each list> element.

The "name" attribute of each list> element SHALL be present and SHALL be unique amongst all elements within the same parent element.

The XDMC MAY store all his service URI's in a single xml document. If so, the name of the file SHALL be "index".

5.2.9 Global documents

This application usage defines no global documents.

5.2.10 Resource interdependencies

This application usage defines no additional resource interdependencies.

5.2.11 Authorization policies

The owner XCAP Client SHALL has the authorization right to access and modify the document.

6. Subscribing to changes in the XML documents

The Shared XDMS SHALL support subscriptions to changes in the XML documents as defined by the procedures in section 6.2.2.1 step 2 to step 6 and 6.2.2.2 of the [XDM Spec].

Appendix A. Static Conformance Requirements

(Normative)

The SCR's defined in the following tables include SCR for:

Shared XDM Application Usages

Each SCR table identifies a list of supported features as:

Item: Identifier for a feature.

Function: Short description of the feature.

Reference: Section(s) of this specification with more details on the feature.

Status: Whether support for the feature is mandatory or optional. MUST use "M" for mandatory support and "O" for optional support in this column.

Requirement: This column identifies other features required by this feature. If no other features are required, this column is left empty.

This section describes the dependency grammar notation to be used in the Requirement column of the SCR and CCR tables using ABNF [RFC2234].

TerminalExpression = ScrReference / NOT TerminalExpression / TerminalExpression LogicalOperator TerminalExpression / "(" TerminalExpression ")"

ScrReference = ScrItem / ScrGroup

ScrItem = SpecScrName "-" GroupType "-" DeviceType "-" NumericId / SpecScrName "-" DeviceType "-" Numericld

ScrGroup = SpecScrName ":" FeatureType / SpecScrName "- " GroupType "-" DeviceType "-" FeatureType

SpecScrName = 1*Character;

GroupType = 1*Character;

DeviceType = "C" / "S"; C - client, S - server

NumericId = Number Number Number

LogicalOperator = "AND" / "OR"; AND has higher precedence than OR and OR is inclusive

FeatureType = "MCF" / "OCF" / "MSF" / "OSF"; See Section A.1.6

Character = %x41-5A; A-Z

Number = %x30-39; 0-9

A.1 Shared XDM Application Usages (Server)

Item	Function	Reference	Status	Requirement
Shared_XDM-AU-S-001	URI list structure	5.1.1	M	
Shared_XDM-AU-S- 002	Application Unique ID in URI list	5.1.2	M	

Item	Function	Reference	Status	Requirement
Shared_XDM-AU-S- 003	XML schema of URI list	5.1.4	М	
Shared_XDM-AU-S- 004	URI list conforms to MIME type	5.1.5	M	
Shared_XDM-AU-S-005	Validation constraints, in addition to the XML schema	5.1.6	M	
Shared_XDM-AU-S- 006	Data semantics of URI list	5.1.7	М	
Shared_XDM-AU-S- 007	Naming conventions for URI list	5.1.8	М	
Shared_XDM-AU-S- 008	Authorization policies	5.1.11	М	XDM-XDMS-S-005
Shared_XDM-AU-S- 009	Subscribing to changes in XML documents	6	М	
Shared_XDM-AU-S- 010	Default name space for URI list and also Group Usage List	5.1.3, 5.2.3	М	
Shared_XDM-AU-S- 011	Group Usage List document structure	5.2.1	О	
Shared_XDM-AU-S-012	Application Unique ID in Group Usage List document	5.2.2	О	
Shared_XDM-AU-S-013	XML schema of Group Usage List document	5.2.4	О	
Shared_XDM-AU-S- 014	Group Usage List document conforms to MIME type	5.2.5	О	
Shared_XDM-AU-S- 015	Validation constraints, in addition to the XML schema	5.2.6	О	
Shared_XDM-AU-S- 016	Data semantics of Group Usage List	5.2.7	О	
Shared_XDM-AU-S- 017	Naming conventions for Group Usage List	5.2.8	О	
Shared_XDM-AU-S- 018	Authorization policies for Group Usage List	5.2.11	О	

A.2 Shared XDM Application Usages (Client)

Item	Function	Reference	Status	Requirement
Shared_XDM-AU-C-001	URI list structure	5.1.1	М	
Shared_XDM-AU-C- 002	Application Unique ID in URI list	5.1.2	М	
Shared_XDM-AU-C - 003	XML schema of URI list	5.1.4	М	
Shared_XDM-AU-C- 004	URI list conforms to MIME type	5.1.5	М	
Shared_XDM-AU-C-005	Validation constraints, in addition to the XML schema	5.1.6	М	
Shared_XDM-AU-C-006	Data semantics of URI list	5.1.7	М	
Shared_XDM-AU-C- 007	Naming conventions for URI list	5.1.8	М	
Shared_XDM-AU-C- 008	Default name space for URI list and also Group Usage List	5.1.3, 5.2.3	О	
Shared_XDM-AU-C- 009	Group Usage List document structure	5.2.1	О	
Shared_XDM-AU-C - 010	Application Unique ID in Group Usage List document	5.2.2	О	
Shared_XDM-AU-C-011	XML schema of Group Usage List document	5.2.4	О	
Shared_XDM-AU-C- 012	Group Usage List document conforms to MIME type	5.2.5	О	
Shared_XDM-AU-C-013	Validation constraints, in addition to the XML schema	5.2.6	О	
Shared_XDM-AU-C- 014	Data semantics of Group Usage List	5.2.7	О	

Item	Function	Reference	Status	Requirement
Shared_XDM-AU-C-015	Naming conventions for Group Usage List	5.2.8	0	

Appendix B. Examples

(Informative)

B.1 Manipulating URI Lists

B.1.1 Obtaining URI Lists

Figure B.1.1 describes how an XDM client obtains URI lists.




Figure B.1.1 XDM Client obtains URI lists

The details of the flows are as follows:

1) The user "sip:ronald.underwood@example.com" wants to obtain the document describing his URI Lists. For this purpose the XDMC sends a HTTP GET request to the Aggregation Proxy. Two main lists exist and one sublist. The sublist with the name "close-friends" is referenced from the poc group document "mypocgroup1" in the application usage org.openmobilealliance.poc-groups.

```
GET /resource-lists/users/sip:ronald.underwood@example.com/index /HTTP/1.1
Host: xcap.example.com
...
```

- 2) Based on the AUID, the Aggregation Proxy forwards the request to Shared XDMS.
- 3) After the Shared XDMS has performed the necessary authorisation checks on the request originator, the Shared XDMS sends an HTTP "200 OK" response including the requested document in the body.

```
HTTP/1.1 200 OK
Etag: "eti87"
Content-Type: application/resource-lists+xml
<?xml version="1.0" encoding="UTF-8"?>
<resource-lists xmlns="urn:ietf:para:xml:ns:resource-lists"</pre>
         xmlns:oau="urn:oma:xml:xdm:resource-list:appusage">
       <list name="oma buddylist">
             <list name="close-friends">
                    <display-name>Close Friends</display-name>
                    <entry uri="sip:hermione.blossom@example.com">
                          <display-name>Hermione</display-name>
                    </entry>
                    <entry uri="tel:5678;phone-context=+43012349999"/>
                    <oau:appusages>
                                           <oau:nodeuri oau:uri="http://xcap.example.com/org.openmobilealliance.poc-</pre>
          groups/mypocgroup1/~~/group/list/list-
          service/list/external%5b@anchor=%22http://xcap.example.com/service/resource-
          lists/users/sip:ronald.underwood@example.com/index/~~resource-
          \label{lists/lists/bename=} 220 ma\_buddylist \\ 22 \\ 5d/list \\ 5b \\ ename = \\ 22 \\ close-friends \\ 22 \\ 85d \\ 5d' \\ 1ist \\ 22 \\ 85d' \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 85b \\ ename = \\ 822 \\ 1ist \\ 822 \\ ename = \\ 822 
          oau:auid="org.opemmobilealliance.poc-groups"/>
                    </oau:appusages>
              </list>
              <entry uri="sip:joe.blogs@example.com">
                          <display-name>Joe</display-name>
```

```
</entry>

</list>
st name="oma_blockedcontacts">
</list>
</resource-lists>
```

4) The Aggregation Proxy routes the response to the XDM Client.

B.1.2 Obtaining Group Usage Lists

Figure B.1.2 describes how an XDM client obtains Group Usage lists.

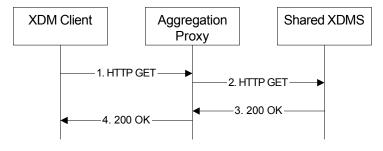


Figure B.1.2 XDM Client obtains Group Usage lists

The details of the flows are as follows:

1) The user "sip:ronald.underwood@example.com" wants to obtain a document describing his Group Usage Lists. For this purpose the XDMC sends a HTTP GET request to the Aggregation Proxy.

```
GET /org.openmobilealliance.group-usage-list/users/sip:ronald.underwood@example.com/index/HTTP/1.1 Host: xcap.example.com ...
```

- 2) Based on the AUID, the Aggregation Proxy forwards the request to Shared XDMS.
- 3) After the Shared XDMS has performed the necessary authorisation checks on the request originator, the Shared XDMS sends an HTTP "200 OK" response including the requested document in the body.

```
HTTP/1.1 200 OK
Etag: "eti87"
Content-Type: application/vnd.oma.group-usage-list+xml
<?xml version="1.0" encoding="UTF-8"?>
<resource-lists xmlns="urn:ietf:params:xml:ns:resource-lists"</pre>
  xmlns:ou="urn:oma:xml:xdm:resource-list:oma-uriusage"
   xmlns:opu="urn:oma:xml:xdm:oma-pocusage">
  <list name="bookmarkedPoCGroups">
    <entry uri="sip:group1 joebloggs@example.com">
       <display-name>Joe's golf friends</display-name>
       <ou:uriusages>
          <opu:pocusage>chat</opu:pocusage>
       </ou:uriusages>
    </entrv>
    <entry uri="sip:group1 bob@example.com">
       <display-name>Bob's ski friends</display-name>
       <ou:uriusages>
          <opu:pocusage>prearranged</opu:pocusage>
       </ou:uriusages>
     </entry>
  </list>
</resource-lists>
```

4) The Aggregation Proxy routes the response to the XDM Client.

Appendix C. Change History

(Informative)

C.1 Approved Version History

Reference	Date	Description
OMA-TS-XDM_Shared-V1_0-20060612-A	12 Jun 2006	Status changed to approved OMA-TP-2006-0196R03-INP_XDM_V1_0_for_final_approval.
OMA-TS-XDM_Shared-V1_0_1-20061128-A	17 Nov 2006	Incorporated CRs: OMA-PAG-2006-0383R03 OMA-PAG-2006-0695R01 OMA-PAG-2006-0745R01
	29 Feb 2008	Status changed to historic OMA-TP-2008-0099R03-INP_XDM_1_0_Historical