



# Lightweight M2M – Binary App Data Container

Approved Version: 1.0.2 – 2024-03-12

Open Mobile Alliance

OMA-TS-LWM2M\_BinaryAppDataContainer-V1\_0\_2-20240312-A

main: 06 May 2024 20:15:00 rev: ae992cd

Use of this document is subject to all of the terms and conditions of the Use Agreement located at <https://www.omaspecworks.org/about/policies-and-terms-of-use/>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile Alliance™ specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification.

However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the “OMA IPR Declarations” list at <https://www.omaspecworks.org/about/intellectual-property-rights/>. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE “OMA IPR DECLARATIONS” LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

THIS DOCUMENT IS PROVIDED ON AN "AS IS" "AS AVAILABLE" AND "WITH ALL FAULTS" BASIS.

Copyright 2024 Open Mobile Alliance.

Used with the permission of the Open Mobile Alliance under the terms set forth above.

# Table of Contents

- [1. Scope](#)
- [2. Reference](#)
  - [2.1. Normative References](#)
  - [2.2. Informative References](#)
- [3. Terminology and Conventions](#)
  - [3.1. Conventions](#)
  - [3.2. Definitions](#)
  - [3.3. Abbreviations](#)
- [4. Introduction](#)
  - [4.1. Version 1.0](#)
- [5. Application Data Container Use cases](#)
  - [5.1. Architecture](#)
  - [5.2. LwM2M Client Reports Application Data](#)
  - [5.3. LwM2M Server Sends Application Data](#)
- [6. LwM2M Object: Application Data Container](#)
- [Appendix A. Change History \(Informative\)](#)
  - [A.1 Approved Version History](#)
- [Appendix B. Example LwM2M Client \(Informative\)](#)

## Table of Figures

[Figure: 5.1.-1 Application data transfer by LwM2M architecture](#)

[Figure: 5.2.-1 LwM2M Client Reports Application Data](#)

[Figure: 5.3.-1 LwM2M Server Sends the Application Data](#)

# Table of Tables

[Table: 2.1.-1 Normative References](#)

[Table: 3.2.-1 Definitions](#)

[Table: 3.3.-1 Abbreviations](#)

[Table: 6.-1 LwM2M Object: BinaryAppDataContainer object definition](#)

[Table: 6.-2 LwM2M Object: BinaryAppDataContainer Resource definitions](#)

[Table: A.1-1 Approved Version History](#)

[Table: B.-1 Object Instances of the example](#)

[Table: B.-2 BinaryAppDataContainer Object Instance \[0\]](#)

[Table: B.-3 BinaryAppDataContainer Object Instance \[1\]](#)

# 1. Scope

This document defines an Object to be used to transfer Application Data with the Lightweight M2M enabler in order to manage application service data on the device.

## 2. Reference

### 2.1. Normative References

[BCP 14]	"Key words for use in RFCs to Indicate Requirement Levels", B. Leiba, May 2017, URL: <a href="https://www.rfc-editor.org/info/bcp14">https://www.rfc-editor.org/info/bcp14</a>
[RFC2119]	"Key words for use in RFCs to Indicate Requirement Levels", S. Bradner, March 1997, URL: <a href="https://www.rfc-editor.org/rfc/rfc2119.txt">https://www.rfc-editor.org/rfc/rfc2119.txt</a>
[RFC8174]	"Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", B. Leiba, May 2017, URL: <a href="https://www.rfc-editor.org/rfc/rfc8174.txt">https://www.rfc-editor.org/rfc/rfc8174.txt</a>
[RFC4234]	"Augmented BNF for Syntax Specifications: ABNF", D. Crocker, Ed., P. Overell, October 2005, URL: <a href="http://www.ietf.org/rfc/rfc4234.txt">http://www.ietf.org/rfc/rfc4234.txt</a>
[SCRRULES]	"SCR Rules and Procedures", Open Mobile Alliance™, OMA-ORG-SCR_Rules_and_Procedures, URL: <a href="http://www.openmobilealliance.org/">http://www.openmobilealliance.org/</a>

Table: 2.1. -1 Normative References

### 2.2. Informative References

## 3. Terminology and Conventions

### 3.1. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

All sections and appendixes, except "Scope" and "Introduction", are normative, unless they are explicitly indicated to be informative.

### 3.2. Definitions

BinaryAppDataCont	Application Data Container
-------------------	----------------------------

Table: 3.2.-1 Definitions

### 3.3. Abbreviations

OMA	Open Mobile Alliance
PDN	Packet data network
PS	Packet switched

Table: 3.3.-1 Abbreviations



## 4. Introduction

LwM2M is designed to support both device management (DM) and service enablement (SE). OMA only specify LwM2M objects for DM, while external organizations may specify and register LwM2M objects for SE (e.g. IPSO objects). However, domain specific applications/devices (e.g. water meter) may not want to expose their data models as LwM2M objects due to security concern or integration cost with legacy systems. Instead, an opaque data blob transfer is often used.

Current practices rely on vendor-specific extension of LwM2M objects to solve the problem above, and this is a well-supported feature of LwM2M's tooling and infrastructure but for the support of legacy systems, or where the formatting of data is to remain opaque, it is desirable to define a standardized, generic means to transfer application-specific data using LwM2M protocol. Please note that this object should ONLY be used in those circumstances where the use of an existing or proprietary LwM2M object is unacceptable.

### 4.1. Version 1.0

Version 1.0 of the specification covers:

1. LwM2M Client reports application data to LwM2M Server.
2. LwM2M Server sends application data to LwM2M Client.

## 5. Application Data Container Use cases

### 5.1. Architecture

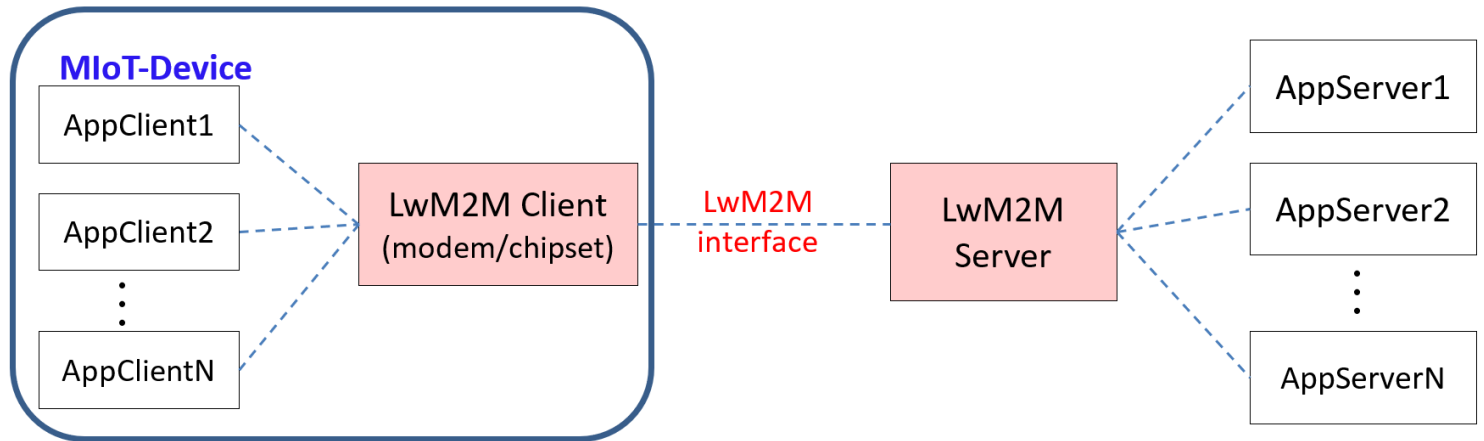


Figure: 5.1.-1 Application data transfer by LwM2M architecture

It is desirable to use a standardized, generic means to transfer application-specific data by LwM2M protocol which supports transferring service data transparently between Application Client and Application Server.

LwM2M Client can communicate with Application client by AT command or API interface. LwM2M Server can communicate with Application Server by standard interface. Both interfaces are out of scope of LwM2M specification.

### 5.2. LwM2M Client Reports Application Data

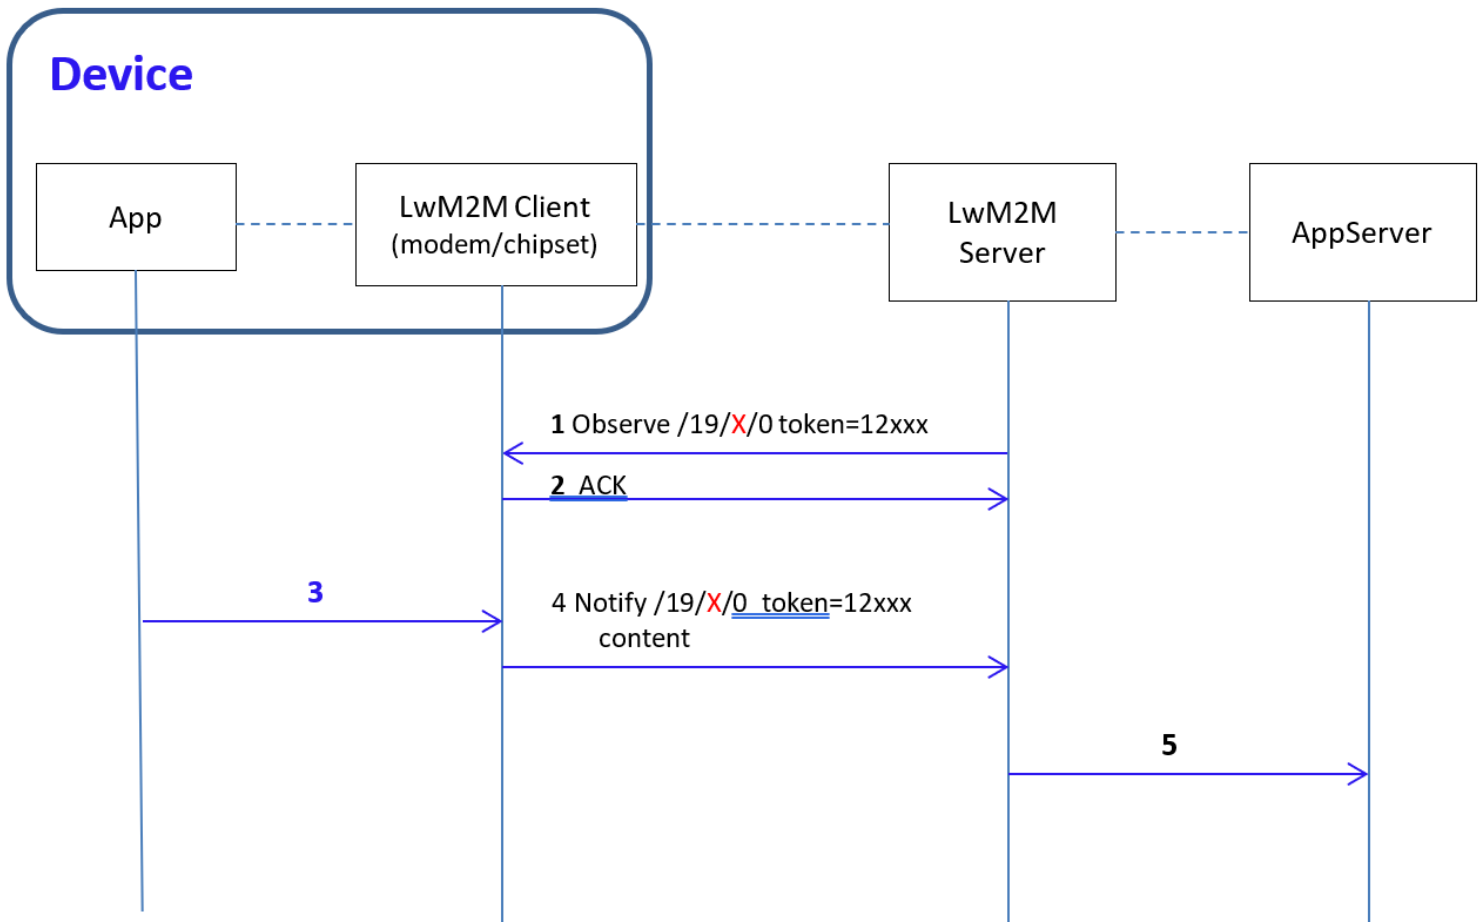


Figure: 5.2.-1 LwM2M Client Reports Application Data

[Figure: 5.2.-1 LwM2M Client Reports Application Data](#) shows an example exchange where the Client reports an Application Data.

Step 1: The LwM2M Server sends the Observe request to LwM2M Client by instant X of Object 19. The instant number is specified in section 6.

Step 2: The LwM2M Client sends the ACK to the server.

Step 3: The Application Client sends the application data to LwM2M Client.

Note: The interface of Step 3 between application client and LwM2M Client is out of the scope of LwM2M specification, eg, AT command or API.

Step 4: The LwM2M Client sends the Notify message to the LwM2M Server.

Step 5: The LwM2M Server sends the application data the Application Server.

Note: The interface of Step 5 between application server and LwM2M server is out of the scope of LwM2M specification, eg, API.

### 5.3. LwM2M Server Sends Application Data

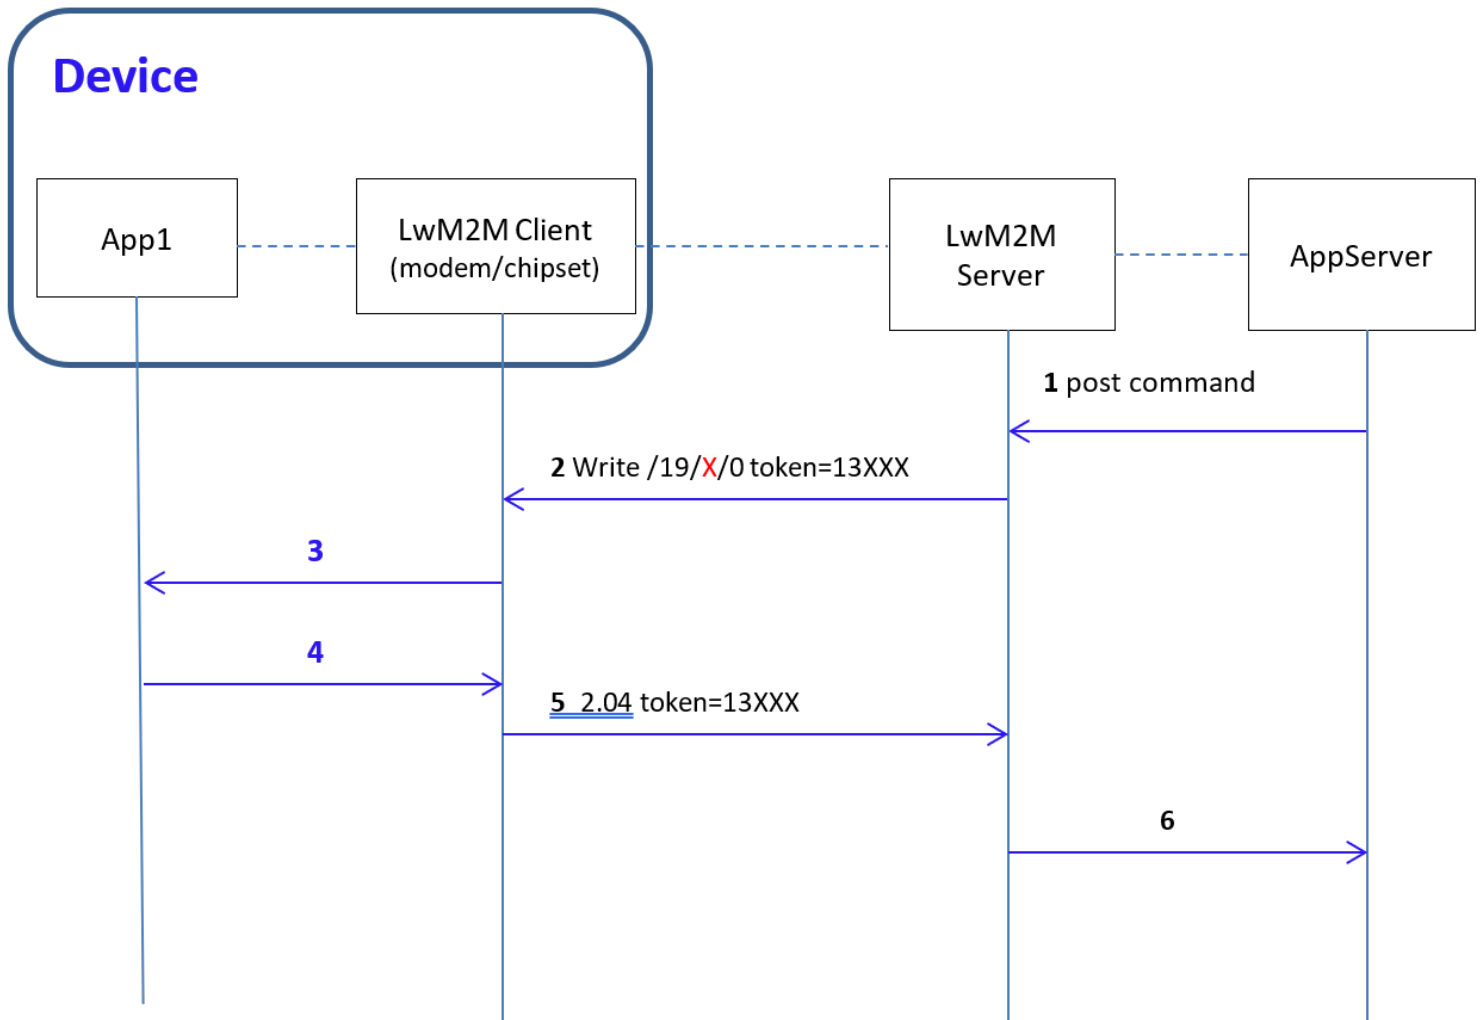


Figure: 5.3.-1 LwM2M Server Sends the Application Data

[Figure: 5.3.-1 LwM2M Server Sends the Application Data](#) shows an example exchange where the Server sends an Application Data message to the Client, eg, “TURN ON” command.

Step 1: The Application Server sends the message to LwM2M Server.

Note: The interface of Step 1 between application server and LwM2M server is out of the scope of LwM2M specification, eg, API.

Step 2: The LwM2M Server sends the Write request to LwM2M Client by instant X of Object 19. The instant number is specified in section 6.

Step 3: The LwM2M Client sends the data to the Application Client.

Step 4: The Application Client sends the application data to LwM2M Client.

Note: The interface of Step 3 and 4 between application client and LwM2M Client are out of the scope of LwM2M specification, eg, AT command or API.

Step 5: The LwM2M Client sends the response message to the LwM2M Server.

Step 6: The LwM2M Server sends the application data the Application Server.

Note: The interface of Step 6 between application server and LwM2M server is out of the scope of LwM2M specification, eg, API.

## 6. LwM2M Object: Application Data Container

### Description

This LwM2M Objects provides the application service data related to a LwM2M Server, eg. Water meter data. There are several methods to create instance to indicate the message direction based on the negotiation between Application and LwM2M. The Client and Server should negotiate the instance(s) used to exchange the data. For example: - Using a single instance for both directions communication, from Client to Server and from Server to Client. - Using an instance for communication from Client to Server and another one for communication from Server to Client - Using several instances

### Object definition

Name	Object ID	Object Version	LWM2M Version
BinaryAppDataContainer	19	1.0	1.0
Object URN		Instances	Mandatory
urn:oma:lwm2m:oma:19		Multiple	Optional

Table: 6.-1 LwM2M Object: BinaryAppDataContainer object definition

### Resource definitions

ID	Name	Operations	Instances	Mandatory	Type	Range or Enumeration	Units	Description
0	Data	RW	Multiple	Mandatory	Opaque			Indicates the application data content.
1	Data Priority	RW	Single	Optional	Integer	1 bytes		Indicates the Application data priority: 0:Immediate 1:BestEffort 2:Latest 3-100: Reserved for future use. 101-254: Proprietary mode.
2	Data Creation Time	RW	Single	Optional	Time			Indicates the Data instance creation timestamp.
3	Data Description	RW	Single	Optional	String	32 bytes		Indicates the data description. e.g. "meter reading".
4	Data Format	RW	Single	Optional	String	32 bytes		Indicates the format of the Application Data. e.g. YG-Meter-Water-Reading UTF8-string
5	App ID	RW	Single	Optional	Integer	2 bytes		Indicates the destination Application ID.

Table: 6.-2 LwM2M Object: BinaryAppDataContainer Resource definitions

## Appendix A. Change History (Informative)

### A.1 Approved Version History

Reference	Date	Description
OMA-TS-LWM2M_BinaryAppDataContainer-V1_0-20180615-A	15 Jun 2018	Status changed to Approved by DM Doc Ref # OMA-DM&SE-2018-0061- INP_LWM2M_APPDATA_V1_o_ERP_for_final_Approval
OMA-TS-LWM2M_BinaryAppDataContainer-V1_0_1-20190221-A	21 Feb 2019	Status changed to Approved by IPSO WG Doc Ref # OMA-IPSO-2019-0025- INP_LwM2M_Object_App_Data_Container_1_0_1_for_Final_Approval
OMA-TS-LWM2M_BinaryAppDataContainer-V1_0_2-20240312-A	12 Mar 2024	Status changed to Approved by DMSO WG on March 12th.

Table: A.1-1 Approved Version History

## Appendix B. Example LwM2M Client (Informative)

Instance 0 is used to send application data from LwM2M client to LwM2M server. Instance 1 is used to send application data from LwM2M server to LwM2M client.

Object	Object ID	Object Instance ID
BinaryAppDataContainer Object[0]	19	0
BinaryAppDataContainer Object[1]	19	1

Table: B.-1 Object Instances of the example

Resource Name	Resource ID	Resource Instance ID	Value	Notes
Data	0	0	InNlcnZpY2VJZCI6Ik1ldGVyIiwNCiJzZXJ2aWNIRGFoYSI6ewoKImN1cnJlbnRSZWFkaW5nIjo1NDYuMyIsDQoic2lnbmFsU3RyZW5ndGgiOjE2LAoKImRhaWx5QWN0aXZpdHlUaW1lIjo1NzA2DQo=	In this example, the Message Data is an encoded version of data for a water meter reading, including: <ul style="list-style-type: none"> <li>• Current reading</li> <li>• Signal strength</li> <li>• temperature</li> </ul>
Data Priority	1		0	
DataCreation Time	2		1367491215	May 2 <sup>nd</sup> , 2013 at 11:42 AM GMT
Data Description	3		"MeterReading"	

Table: B.-2 BinaryAppDataContainer Object Instance [0]

Resource Name	Resource ID	Resource Instance ID	Value	Notes
Data	0	0	InNlcnZpY2VJZCI6IldhdGVyTlVVoZXIiLAoKImNtZCI6IiNFVF9URU1QRVJBVFVSRV9SRUFEX1BFUklPRCIsDQoicGFyYXMiOmsNCij2YWx1ZSI6NAoKICAgIHosDQoNCgoK	In this example, the Message Data is an encoded version of data for a water meter reading, including: <ul style="list-style-type: none"> <li>• Command ( "Set Temperature Read Period" )</li> <li>• Parameters associated with the command</li> </ul>
Data Priority	1		1	
DataCreation Time	2		1367491215	May 2 <sup>nd</sup> , 2013 at 11:42 AM GMT
Data Description	3		"ReadPeriodSet"	

Table: B.-3 BinaryAppDataContainer Object Instance [1]



