



OMA Mobile Location Service Architecture

Candidate Version 1.1 – 20 Oct 2006

Open Mobile Alliance

OMA-AD-MLS-V1_1-20061020-C

Use of this document is subject to all of the terms and conditions of the Use Agreement located at <http://www.openmobilealliance.org/UseAgreement.html>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile Alliance™ specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the “OMA IPR Declarations” list at <http://www.openmobilealliance.org/ipr.html>. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE “OMA IPR DECLARATIONS” LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2006 Open Mobile Alliance Ltd. All Rights Reserved.

Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

Contents

- 1. SCOPE (INFORMATIVE)4
- 2. REFERENCES5
 - 2.1 NORMATIVE REFERENCES.....5
 - 2.2 INFORMATIVE REFERENCES.....5
- 3. TERMINOLOGY AND CONVENTIONS6
 - 3.1 CONVENTIONS.....6
 - 3.2 DEFINITIONS.....6
 - 3.3 ABBREVIATIONS.....6
- 4. INTRODUCTION (INFORMATIVE).....8
 - 4.1 PLANNED PHASES.....9
 - 4.2 SECURITY CONSIDERATIONS.....9
- 5. ARCHITECTURAL MODEL10
 - 5.1 DEPENDENCIES.....10
 - 5.2 ARCHITECTURAL DIAGRAM10
 - 5.3 FUNCTIONAL COMPONENTS AND INTERFACES10
 - 5.4 FLOWS10
- APPENDIX A. CHANGE HISTORY (INFORMATIVE).....11
 - A.1 APPROVED VERSION HISTORY11
 - A.2 DRAFT/CANDIDATE VERSION V1.1 HISTORY11

Figures

- Figure 1: Architectural diagram of MLS8
- Figure 2: Relevant Reference Points in SUPL.....8

1. Scope (Informative)

This document is the AD for the Mobile Location Service V1.1 (MLS V1.1), which consists of the Mobile Location Protocol 3.2 (MLP V3.2), Roaming Location Protocol (RLP V1.0) and Location Privacy Checking Protocol (PCP V1.0). The scope of MLS V1.1 relative MLS V1.0 is only to add the specification for PCP V1.0 that was not included in the MLS V1.0 enabler release.

2. References

2.1 Normative References

- [23.271] “Functional stage 2 description of Location Services “, 3GPP, TS 23.271 Release 6,
URL: http://www.3gpp.org/ftp/Specs/latest/Rel-6/23_series/
- [MLP 3.2] “Mobile Location Protocol v3.2”, Open Mobile Alliance™, OMA-TS-MLP-V3_2,
URL: <http://www.openmobilealliance.org/>
- [MLS RD] “Mobile Location Service Requirements”, Open Mobile Alliance™, OMA-RD-MLS-V1_0,
URL: <http://www.openmobilealliance.org/>
- [OSE] “OMA Service Environment”,
URL: <http://www.openmobilealliance.org/>
- [PCP 1.0] “Privacy Checking Protocol v1.0”, Open Mobile Alliance™, OMA-TS-PCP-V1_0,
URL: <http://www.openmobilealliance.org/>
- [RFC 2616] "Hypertext Transfer Protocol –HTTP/1.1" IETF, June 1999.
URL: <http://www.ietf.org/rfc/rfc2616.txt>
- [RFC2119] “Key words for use in RFCs to Indicate Requirement Levels”, S. Bradner, March 1997,
URL: <http://www.ietf.org/rfc/rfc2119.txt>
- [RLP 1.0] “Roaming Location Protocol v1.0”, Open Mobile Alliance™, OMA-TS-RLP-V1_0,
URL: <http://www.openmobilealliance.org/>
- [SUPL RD] “Secure User Plane Location Requirements”, Open Mobile Alliance™, OMA-RD-SUPL-V1_0,
URL: <http://www.openmobilealliance.org/>
- [WSDL] Web Services Description Language 1.1, W3C Note, 15 March 2001,
URL: <http://www.w3.org/TR/wSDL>

2.2 Informative References

- [ARCH-PRINC] “OMA Architecture Principles”, OMA-ArchitecturePrinciples-V1_2,
URL: <http://www.openmobilealliance.org/>
- [ARCH-REVIEW] “OMA Architecture Review Process”, OMA-ORG-ARCHReviewProcess-V1_3,
URL: <http://www.openmobilealliance.org/>
- [OMA-DICT] “OMA Dictionary”, OMA-Dictionary-V2_1,
URL: <http://www.openmobilealliance.org/>

3. Terminology and Conventions

3.1 Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except “Scope” and “Introduction”, are normative, unless they are explicitly indicated to be informative.

This is an informative document, which is not intended to provide testable requirements to implementations.

3.2 Definitions

Interface	See [OMA-DICT].
Location Privacy Checking Entity	Location Privacy Checking Entity, responsible for resolving IDs and for privacy checking. In 3GPP context this corresponds to the Privacy Profile Register (PPR). The PPR may be a part of the GMLC.
Location Server	Software and/or hardware entity offering location capabilities. In 3GPP context this corresponds to the Gateway Mobile Location Center (GMLC).
MLS client	Software and/or hardware entity requesting location. In 3GPP context this corresponds to the LoCation Services client (LCS Client).
Mobile Location Service	A service with location capability
Reference Point	See [OMA-DICT].
SUPL Enabled Terminal (SET)	A device that is capable of communicating with a SUPL network. Examples of this could be a UE in UMTS, a MS in GSM or IS-95, or a PC over an IP-based transport.
SUPL Location Platform (SLP)	Entity responsible for SUPL Service Management and Position Determination. SLP contains the SLC and SPC Functions.
SUPL Provider	Mobile Network Operator, provides location assistance data to the SUPL Agent and optionally calculates the SET location. See also [SUPL RD]

3.3 Abbreviations

3GPP	3 rd Generation Partnership Project
AD	Architecture Document
GPS	Global Positioning System
GSM	Global System for Mobile Communication
HTTP	Hyper Text Transport Protocol
LCS	LoCation Service
LS	Location Server
MLP	Mobile Location Protocol
MLS	Mobile Location Service
OMA	Open Mobile Alliance
PCE	Location Privacy Checking Entity
PCP	Location Privacy Checking Protocol
RD	Requirement Document
RLP	Roaming Location Protocol

SLP	SUPL Location Platform
SUPL	Secure User Plane Location
TS	Technical Specification
UMTS	Universal Mobile Telecommunication System
WSDL	Web Services Description Language
XML	Extensible Markup Language

4. Introduction (Informative)

The OMA Mobile Location Service V1.1 (MLS V1.1) consists of a set of location specifications complying with 3GPP Release 6 LCS Specification [23.271]. The set of specifications in MLS V1.1 consist of MLP V3.2 [MLP 3.2], RLP V1.0 [RLP 1.0] and PCP V1.0 [PCP 1.0].

MLP V3.2 describes the protocol between an MLS client and the LS. In the 3GPP context, MLP V3.2 was chosen to be an instantiation of the stage 3 specification for the Le reference point [23.271].

RLP V1.0 describes the protocol between two LS. In the 3GPP context, RLP V1.0 will be an instantiation of the stage 3 specification for the Lr reference point [23.271]. Additionally, RLP V1.0 will be an instantiation of the reference point Lr as defined in [SUPL AD] between two SLPs with the purpose to transport information between SLPs to enable positioning of roaming SUPL Enabled Terminals [SUPL RD]. Examples of such information are coarse position used when generating GPS assistance data or the actual GPS assistance data.

PCP V1.0 describes the protocol between the LS and a Location Privacy Checking Entity (PCE). In the 3GPP context, PCP V1.0 will be an instantiation of the stage 3 specifications for the Lid/Lpp reference points [23.271].

The OMA Mobile Location Service V1.1 (MLS V1.1) will benefit the industry widely and not only 3GPP and more requirements have been added as needed for wireless technologies besides GSM and UMTS. One example of such an added requirement is the support of transport of SUPL parameter, see requirement R1 listed in section 4.3.

Figure 1 shows an architectural diagram of MLS, its components and interfaces.

Figure 2 shows an architectural diagram of relevant components and interfaces in SUPL.

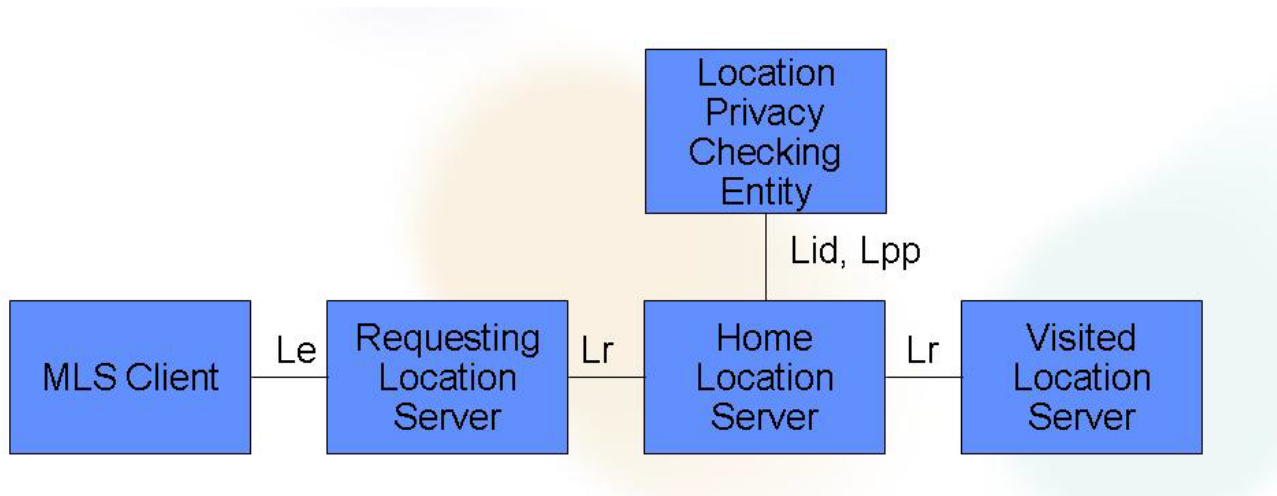


Figure 1: Architectural diagram of MLS

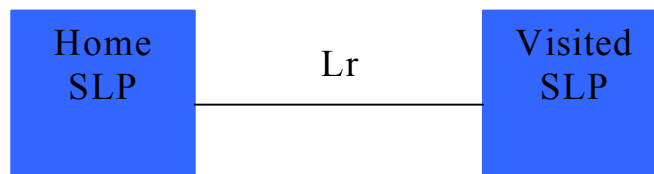


Figure 2: Relevant Reference Points in SUPL

4.1 Planned Phases

MLS V1.1 includes the PCP TS [PCP 1.0] that was not included in MLS V1.0. No new requirements are defined for MLS V1.1 relative to MLS V1.0. As new requirements are defined for MLS, new major versions will be worked at.

4.2 Security Considerations

Relative to MLS 1.0 the specification of the PCP protocol [PCP 1.0] is added. The security aspect of PCP protocol specification [PCP 1.0] should thus be reviewed by the OMA Security Group.

5. Architectural Model

The Architectural model of MLS V1.1 is described in [23.271]. The Architectural model described in [23.271] is summarised in [Figure 1] in section 4.

5.1 Dependencies

MLS V1.1 has no dependencies to other architectures in OMA.

5.2 Architectural Diagram

The architecture for MLS V1.1 is described in [23.271]. MLS V 1.1 also contains network specific parameters and more, beyond the scope of [23.271].

5.3 Functional Components and Interfaces

The Architecture of MLS V1.1 as described in [23.271] defines four reference points Le, Lr, Lpp and Lid. These are instantiated by three OMA protocol specifications as listed below.

Reference point Le is instantiated by MLP V3.2 [MLP 3.2]. MLP V3.2 is defined using XML transported over HTTP [RFC 2616].

Reference point Lr is instantiated by RLP V1.0 [RLP 1.0]. RLP V1.0 is defined using XML transported over HTTP [RFC 2616].

Reference points Lpp and Lid are instantiated by PCP V1.0 [PCP 1.0]. PCP V1.0 is defined using WSDL [WSDL].

The Architecture of MLS V1.1 as described in [23.271] also describes the components in the architecture as shown in [Figure 1] in section 4. The components are:

- MLS Client that is described in [23.271] section 6.3.2
- Requesting Location Server, Home Location Server and Visited Location Server that are described in [23.271] section 6.3.3
- Location Privacy Checking Entity that is described in [23.271] section 6.3.11 and 6.3.12.

For the transport of MLP V3.2 and RLP V1.0 over HTTP the following mechanism applies. All Location Services are invoked by sending a request using HTTP POST. The answer to the invocation of a Location Service is returned using an HTTP response. If the MLS Client requests standard location of asynchronous mode, triggered or periodic reporting of location, the Location Server will, in addition to the answer returned in a HTTP response, return one or more reports by performing HTTP POST operations towards the client. The client must specify the URI that the report should be posted to. This is done in the service request or by having it in the LCS client profile that can be stored in the Location Server.

5.4 Flows

The flows for MLS V1.1 are described in [23.271] section 9.

Appendix A. Change History

(Informative)

A.1 Approved Version History

Reference	Date	Description
n/a	n/a	No prior version –or- No previous version within OMA

A.2 Draft/Candidate Version V1.1 History

Document Identifier	Date	Sections	Description
Candidate Versions OMA-AD-MLS-V1_0	07 Jun 2005		The latest Candidate version of MLS 1.0 when this document was created.
Draft Versions OMA-AD-MLS-V1_1	17 Oct 2005	n/a	First draft based on content of OMA-AD-MLS-V1_0-20050607-C with following changes: <ul style="list-style-type: none"> - Content moved to latest template - Text covering use cases & requirements excluded - MLS V1.0 changed to MLS V1.1 - Difference relative MLS 1.0 defined - Exclusion of PCP 1.0 removed - Text in section 4.2 “Security considerations” added.
	24 Jul 2006	all	Clean-up in preparation for Approval as Candidate
	29 Aug 2006		Corrections to resolve consistency review comment (see OMA-CONRR-MLS-V1.1-). References [PRIVACY RD] and duplicate of reference [RFC2119] removed.
Candidate Version OMA-AD-MLS-V1_1	20 Oct 2006	n/a	Status changed to Candidate by TP: OMA ref# OMA-TP-2006-0288- INP_MLS_V1_1_ERP_for_Candidate_Approval