



# RESTful bindings for Parlay X Web Services – Short Messaging

Approved Version 1.1 – 24 Jul 2012

---

**Open Mobile Alliance**  
OMA-TS-ParlayREST\_ShortMessaging-V1\_1-20120724-A

Use of this document is subject to all of the terms and conditions of the Use Agreement located at <http://www.openmobilealliance.org/UseAgreement.html>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile Alliance™ specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the “OMA IPR Declarations” list at <http://www.openmobilealliance.org/ipr.html>. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE “OMA IPR DECLARATIONS” LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2012 Open Mobile Alliance Ltd. All Rights Reserved.

Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

# Contents

<b>1. SCOPE .....</b>	<b>9</b>
<b>2. REFERENCES .....</b>	<b>10</b>
<b>2.1 NORMATIVE REFERENCES.....</b>	<b>10</b>
<b>2.2 INFORMATIVE REFERENCES.....</b>	<b>10</b>
<b>3. TERMINOLOGY AND CONVENTIONS .....</b>	<b>11</b>
<b>3.1 CONVENTIONS .....</b>	<b>11</b>
<b>3.2 DEFINITIONS.....</b>	<b>11</b>
<b>3.3 ABBREVIATIONS .....</b>	<b>11</b>
<b>4. INTRODUCTION .....</b>	<b>12</b>
<b>4.1 VERSION 1.0 .....</b>	<b>12</b>
<b>4.2 VERSION 1.1 .....</b>	<b>12</b>
<b>5. SHORT MESSAGING SERVICE (SMS) API DEFINITION.....</b>	<b>13</b>
<b>5.1 RESOURCES SUMMARY .....</b>	<b>13</b>
<b>5.2 SMS PARLAYREST API DATA STRUCTURES.....</b>	<b>18</b>
<b>5.2.1 Type: InboundSMSMessageList.....</b>	<b>18</b>
<b>5.2.2 Type: InboundSMSMessage .....</b>	<b>19</b>
<b>5.2.3 Type: InboundSMSMessageNotification.....</b>	<b>19</b>
<b>5.2.4 Type: SubscriptionList.....</b>	<b>20</b>
<b>5.2.5 Type: Subscription .....</b>	<b>20</b>
<b>5.2.6 Type: InboundSMSMessageRetrieveAndDeleteRequest.....</b>	<b>21</b>
<b>5.2.7 Type: OutboundSMSMessageRequestList .....</b>	<b>21</b>
<b>5.2.8 Type: OutboundSMSMessageRequest.....</b>	<b>22</b>
<b>5.2.9 Type: OutboundSMSTextMessage .....</b>	<b>24</b>
<b>5.2.10 Type: OutboundSMSBinaryMessage.....</b>	<b>24</b>
<b>5.2.11 Type: OutboundSMSLogoMessage .....</b>	<b>24</b>
<b>5.2.12 Type: OutboundSMSRingToneMessage .....</b>	<b>24</b>
<b>5.2.13 Type: DeliveryInfoList .....</b>	<b>24</b>
<b>5.2.14 Type: DeliveryInfoNotification .....</b>	<b>25</b>
<b>5.2.15 Type: DeliveryInfo.....</b>	<b>25</b>
<b>5.2.16 Type: DeliveryReceiptSubscriptionList.....</b>	<b>26</b>
<b>5.2.17 Type: DeliveryReceiptSubscription .....</b>	<b>27</b>
<b>5.2.18 Enumeration: DeliveryStatus .....</b>	<b>27</b>
<b>5.2.19 Enumeration: SmsFormat .....</b>	<b>28</b>
<b>5.2.20 Enumeration: RetrievalOrder .....</b>	<b>28</b>
<b>5.2.21 Values of the Link “rel” attribute.....</b>	<b>28</b>
<b>5.3 SEQUENCE DIAGRAMS .....</b>	<b>29</b>
<b>5.3.1 Send SMS and check the delivery status.....</b>	<b>29</b>
<b>5.3.2 Inbound SMS message delivery (push mode).....</b>	<b>30</b>
<b>5.3.3 Inbound SMS message delivery (polling mode) .....</b>	<b>31</b>
<b>5.4 RESOURCE: INBOUND SMS MESSAGE REQUESTS FOR A GIVEN REGISTRATION .....</b>	<b>32</b>
<b>5.4.1 Request URI variables .....</b>	<b>32</b>
<b>5.4.2 Response Codes .....</b>	<b>32</b>
<b>5.4.2.1 Response Codes .....</b>	<b>32</b>
<b>5.4.2.2 Exception fault codes.....</b>	<b>32</b>
<b>5.4.3 GET.....</b>	<b>32</b>
<b>5.4.3.1 Example 1: regular request (Informative).....</b>	<b>32</b>
<b>5.4.3.1.1 Request .....</b>	<b>32</b>
<b>5.4.3.1.2 Response.....</b>	<b>33</b>
<b>5.4.3.2 Example 2: maxBatchSize exceeding the allowed size (Informative).....</b>	<b>33</b>
<b>5.4.3.2.1 Request .....</b>	<b>33</b>
<b>5.4.3.2.2 Response.....</b>	<b>33</b>
<b>5.4.4 PUT .....</b>	<b>34</b>
<b>5.4.5 POST .....</b>	<b>34</b>

5.4.6	DELETE .....	34
<b>5.5</b>	<b>RESOURCE: INBOUND SMS MESSAGES RETRIEVE AND DELETE USING REGISTRATION .....</b>	<b>34</b>
5.5.1	Request URI variables .....	34
5.5.2	Response Codes .....	35
5.5.2.1	<i>Response Codes</i> .....	35
5.5.2.2	<i>Exception fault codes</i> .....	35
5.5.3	GET .....	35
5.5.4	PUT .....	35
5.5.5	POST .....	35
5.5.5.1	<i>Example (Informative)</i> .....	35
5.5.5.1.1	Request .....	35
5.5.5.1.2	Response .....	36
5.5.6	DELETE .....	36
<b>5.6</b>	<b>RESOURCE: INBOUND SMS MESSAGE FOR A GIVEN REGISTRATION .....</b>	<b>36</b>
5.6.1	Request URI variables .....	36
5.6.2	Response Codes .....	37
5.6.2.1	<i>HTTP Response Codes</i> .....	37
5.6.3	GET .....	37
5.6.3.1	<i>Example 1: regular request (Informative)</i> .....	37
5.6.3.1.1	Request .....	37
5.6.3.1.2	Response .....	37
5.6.3.2	<i>Example 2: invalid (non-existing) messageId (Informative)</i> .....	37
5.6.3.2.1	Request .....	37
5.6.3.2.2	Response .....	38
5.6.4	PUT .....	38
5.6.5	POST .....	38
5.6.6	DELETE .....	38
5.6.6.1	<i>Example (Informative)</i> .....	38
5.6.6.1.1	Request .....	38
5.6.6.1.2	Response .....	38
<b>5.7</b>	<b>RESOURCE: INBOUND SMS MESSAGE SUBSCRIPTIONS .....</b>	<b>38</b>
5.7.1	Request URI variables .....	39
5.7.2	Response Codes .....	39
5.7.2.1	<i>HTTP Response Codes</i> .....	39
5.7.2.2	<i>Exception fault codes</i> .....	39
5.7.3	GET .....	39
5.7.3.1	<i>Example (Informative)</i> .....	39
5.7.3.1.1	Request .....	39
5.7.3.1.2	Response .....	39
5.7.4	PUT .....	40
5.7.5	POST .....	40
5.7.5.1	<i>Example 1: returning a representation of created resource (Informative)</i> .....	40
5.7.5.1.1	Request .....	40
5.7.5.1.2	Response .....	40
5.7.5.2	<i>Example 2: returning the location of created resource (Informative)</i> .....	41
5.7.5.2.1	Request .....	41
5.7.5.2.2	Response .....	41
5.7.6	DELETE .....	41
<b>5.8</b>	<b>RESOURCE: INDIVIDUAL INBOUND SMS MESSAGE SUBSCRIPTION .....</b>	<b>41</b>
5.8.1	Request URI variables .....	42
5.8.2	Response Codes .....	42
5.8.2.1	<i>HTTP Response Codes</i> .....	42
5.8.2.2	<i>Exception fault codes</i> .....	42
5.8.3	GET .....	42
5.8.3.1	<i>Example (Informative)</i> .....	42
5.8.3.1.1	Request .....	42
5.8.3.1.2	Response .....	42
5.8.4	PUT .....	43
5.8.5	POST .....	43
5.8.6	DELETE .....	43

5.8.6.1	<i>Example (Informative)</i>	43
5.8.6.1.1	Request	43
5.8.6.1.2	Response	43
<b>5.9</b>	<b>RESOURCE: CLIENT NOTIFICATION ABOUT INBOUND SMS MESSAGE</b>	<b>43</b>
5.9.1	Request URI variables	43
5.9.2	HTTP Response Codes	43
5.9.3	GET	43
5.9.4	PUT	44
5.9.5	POST	44
5.9.5.1	<i>Example (Informative)</i>	44
5.9.5.1.1	Request	44
5.9.5.1.2	Response	44
5.9.6	DELETE	44
<b>5.10</b>	<b>RESOURCE: OUTBOUND SMS MESSAGE REQUESTS</b>	<b>44</b>
5.10.1	Request URI variables	44
5.10.2	Response Codes	45
5.10.2.1	<i>HTTP Response Codes</i>	45
5.10.2.2	<i>Exception fault codes</i>	45
5.10.3	GET	45
5.10.3.1	<i>Example (Informative)</i>	45
5.10.3.1.1	Request	45
5.10.3.1.2	Response	45
5.10.4	PUT	46
5.10.5	POST	46
5.10.5.1	<i>Example 1: returning representation of created resource in response (Informative)</i>	46
5.10.5.1.1	Request	46
5.10.5.1.2	Response	47
5.10.5.2	<i>Example 2: returning location of created resource in response (Informative)</i>	47
5.10.5.2.1	Request	47
5.10.5.2.2	Response	48
5.10.5.3	<i>Example 3: serviceException in case of single address or all multiple addresses failure (Informative)</i>	48
5.10.5.3.1	Request	48
5.10.5.3.2	Response	49
5.10.5.4	<i>Example 4: multiple addresses partial success, with deliveryInfoList in response (Informative)</i>	49
5.10.5.4.1	Request	49
5.10.5.4.2	Response	50
5.10.5.5	<i>Example 5: multiple addresses partial success, without deliveryInfoList in response (Informative)</i>	50
5.10.5.5.1	Request	50
5.10.5.5.2	Response	51
5.10.5.6	<i>Example 6: using SHORT CODE as senderAddress (Informative)</i>	51
5.10.5.6.1	Request	51
5.10.5.6.2	Response	52
5.10.6	DELETE	52
<b>5.11</b>	<b>RESOURCE: OUTBOUND SMS MESSAGE REQUEST AND DELIVERY STATUS</b>	<b>53</b>
5.11.1	Request URI variables	53
5.11.2	Response Codes	53
5.11.2.1	<i>HTTP Response Codes</i>	53
5.11.2.2	<i>Exception fault codes</i>	53
5.11.3	GET	53
5.11.3.1	<i>Example (Informative)</i>	53
5.11.3.1.1	Request	53
5.11.3.1.2	Response	53
5.11.4	PUT	54
5.11.5	POST	54
5.11.6	DELETE	54
<b>5.12</b>	<b>RESOURCE: OUTBOUND SMS MESSAGE DELIVERY STATUS</b>	<b>54</b>
5.12.1	Request URI variables	55
5.12.2	Response Codes	55
5.12.2.1	<i>HTTP Response Codes</i>	55
5.12.2.2	<i>Exception fault codes</i>	55
5.12.3	GET	55

<i>5.12.3.1 Example (Informative).....</i>	55
5.12.3.1.1 Request.....	55
5.12.3.1.2 Response.....	55
5.12.4 PUT .....	56
5.12.5 POST .....	56
5.12.6 DELETE .....	56
<b>5.13 RESOURCE: OUTBOUND SMS MESSAGE DELIVERY NOTIFICATION SUBSCRIPTIONS.....</b>	<b>56</b>
5.13.1 Request URI variables .....	56
5.13.2 Response Codes .....	56
<i>5.13.2.1 HTTP Response Codes .....</i>	56
<i>5.13.2.2 Exception fault codes.....</i>	56
5.13.3 GET.....	57
<i>5.13.3.1 Example (Informative).....</i>	57
5.13.3.1.1 Request.....	57
5.13.3.1.2 Response.....	57
5.13.4 PUT .....	57
5.13.5 POST.....	57
<i>5.13.5.1 Example (Informative).....</i>	58
5.13.5.1.1 Request.....	58
5.13.5.1.2 Response.....	58
5.13.6 DELETE .....	58
<b>5.14 RESOURCE: INDIVIDUAL OUTBOUND SMS MESSAGE DELIVERY NOTIFICATION SUBSCRIPTION.....</b>	<b>59</b>
5.14.1 Request URI variables .....	59
5.14.2 HTTP Response Codes .....	59
<i>5.14.2.1 HTTP Response Codes .....</i>	59
<i>5.14.2.2 Exception fault codes.....</i>	59
5.14.3 GET.....	59
<i>5.14.3.1 Example (Informative).....</i>	59
5.14.3.1.1 Request.....	59
5.14.3.1.2 Response.....	59
5.14.4 PUT .....	60
5.14.5 POST.....	60
5.14.6 DELETE .....	60
<i>5.14.6.1 Example (Informative).....</i>	60
5.14.6.1.1 Request.....	60
5.14.6.1.2 Response.....	60
<b>5.15 RESOURCE: CLIENT NOTIFICATION ABOUT OUTBOUND SMS MESSAGE DELIVERY STATUS .....</b>	<b>60</b>
5.15.1 Request URI variables .....	60
5.15.2 HTTP Response Codes .....	61
5.15.3 GET.....	61
5.15.4 PUT .....	61
5.15.5 POST.....	61
<i>5.15.5.1 Example (Informative).....</i>	61
5.15.5.1.1 Request.....	61
5.15.5.1.2 Response.....	61
5.15.6 DELETE .....	61
<b>APPENDIX A. CHANGE HISTORY (INFORMATIVE).....</b>	<b>62</b>
<b>A.1 APPROVED VERSION HISTORY .....</b>	<b>62</b>
<b>APPENDIX B. STATIC CONFORMANCE REQUIREMENTS (NORMATIVE) .....</b>	<b>63</b>
<b>B.1 SCR FOR PARLAYREST.SMS SERVER.....</b>	<b>63</b>
B.1.1 SCR for ParlayREST.SMS.Inbound.Registration Server .....	63
B.1.2 SCR for ParlayREST.SMS.Inbound.RetrieveDelete Server.....	63
B.1.3 SCR for ParlayREST.SMS.Individual.Inbound Server.....	63
B.1.4 SCR for ParlayREST.SMS.Inbound.Subscr Server .....	64
B.1.5 SCR for ParlayREST.SMS.Inbound.Individual.Subscr Server.....	64
B.1.6 SCR for ParlayREST.SMS.Inbound.Notifications Server .....	64
B.1.7 SCR for ParlayREST.SMS.Outbound Server .....	64
B.1.8 SCR for ParlayREST.SMS.Outbound.MsgAndDeliveryStatus Server.....	65

B.1.9	SCR for ParlayREST.SMS.Outbound.DeliveryStatus Server.....	65
B.1.10	SCR for ParlayREST.SMS.Outbound.Subscriptions Server.....	65
B.1.11	SCR for ParlayREST.SMS.Individual.Outbound.Subscr Server .....	66
B.1.12	SCR for ParlayREST.SMS.Outbound.DeliveryStatus.Notifications Server .....	66
<b>APPENDIX C.</b>	<b>APPLICATION/X-WWW-FORM-URLENCODED REQUEST FORMAT FOR SELECTED REST OPERATIONS (NORMATIVE) .....</b>	<b>67</b>
<b>C.1</b>	<b>SEND A SMS TO A TERMINAL.....</b>	<b>67</b>
C.1.1	Example (Informative).....	68
C.1.1.1	<i>Request.....</i>	68
C.1.1.2	<i>Response .....</i>	68
<b>C.2</b>	<b>START DELIVERY RECEIPT NOTIFICATION.....</b>	<b>69</b>
C.2.1	Example (Informative).....	69
C.2.1.1	<i>Request.....</i>	69
C.2.1.2	<i>Response .....</i>	70
<b>C.3</b>	<b>START SMS NOTIFICATION .....</b>	<b>70</b>
C.3.1	Example (Informative).....	71
C.3.1.1	<i>Request.....</i>	71
C.3.1.2	<i>Response .....</i>	71
<b>APPENDIX D.</b>	<b>JSON EXAMPLES (INFORMATIVE) .....</b>	<b>72</b>
<b>D.1</b>	<b>INBOUND MESSAGE DELIVERY (SECTION 5.4.3.1).....</b>	<b>72</b>
<b>D.2</b>	<b>MAXBATCHSIZE EXCEEDING THE ALLOWED SIZE (SECTION 5.4.3.2).....</b>	<b>73</b>
<b>D.3</b>	<b>RETRIEVE AND DELETE USING REGISTRATION (SECTION 5.5.5.1).....</b>	<b>73</b>
<b>D.4</b>	<b>INBOUND MESSAGES FOR A GIVEN REGISTRATION (SECTION 5.6.3.1) .....</b>	<b>74</b>
<b>D.5</b>	<b>INVALID (NON-EXISTING) MESSAGEID (SECTION 5.6.3.2) .....</b>	<b>74</b>
<b>D.6</b>	<b>REMOVE MESSAGE FROM GATEWAY STORAGE (SECTION 5.6.6.1) .....</b>	<b>75</b>
<b>D.7</b>	<b>READ ACTIVE SUBSCRIPTIONS (SECTION 5.7.3.1).....</b>	<b>75</b>
<b>D.8</b>	<b>CREATE NEW MESSAGE SUBSCRIPTION (SECTION 5.7.5.1).....</b>	<b>76</b>
<b>D.9</b>	<b>RETURNING THE LOCATION OF CREATED RESOURCE (SECTION 5.7.5.2) .....</b>	<b>77</b>
<b>D.10</b>	<b>READ INDIVIDUAL SUBSCRIPTION (SECTION 5.8.3.1) .....</b>	<b>77</b>
<b>D.11</b>	<b>DELETE A SUBSCRIPTION (SECTION 5.8.6.1).....</b>	<b>78</b>
<b>D.12</b>	<b>NOTIFY CLIENT ABOUT MESSAGE ARRIVAL (SECTION 5.9.5.1) .....</b>	<b>78</b>
<b>D.13</b>	<b>RETRIEVE LIST OF PENDING OUTBOUND MESSAGES (SECTION 5.10.3.1).....</b>	<b>79</b>
<b>D.14</b>	<b>CREATE OUTBOUND MESSAGE, RETURNING A REPRESENTATION OF CREATED RESOURCE (SECTION 5.10.5.1)</b>	<b>80</b>
<b>D.15</b>	<b>CREATE OUTBOUND MESSAGE, RETURNING THE LOCATION OF CREATED RESOURCE (SECTION 5.10.5.2).....</b>	<b>81</b>
<b>D.16</b>	<b>SERVICEEXCEPTION IN CASE OF SINGLE ADDRESS OR ALL MULTIPLE ADDRESSES FAILURE (SECTION 5.10.5.3)..</b>	<b>81</b>
<b>D.17</b>	<b>MULTIPLE ADDRESSES PARTIAL SUCCESS, WITH DELIVERYINFOLIST IN RESPONSE (SECTION 5.10.5.4) .....</b>	<b>82</b>
<b>D.18</b>	<b>MULTIPLE ADDRESSES PARTIAL SUCCESS, WITHOUT DELIVERYINFOLIST IN RESPONSE (SECTION 5.10.5.5)...</b>	<b>83</b>
<b>D.19</b>	<b>CREATE OUTBOUND MESSAGE USING SHORT CODE AS SENDERADDRESS, RETURNING A REPRESENTATION OF CREATED RESOURCE (SECTION 5.10.5.6).....</b>	<b>84</b>
<b>D.20</b>	<b>GET MESSAGE DELIVERY STATUS (SECTION 5.11.3.1) .....</b>	<b>85</b>
<b>D.21</b>	<b>GET MESSAGE DELIVERY STATUS (SECTION 5.12.3.1) .....</b>	<b>86</b>
<b>D.22</b>	<b>READ DELIVERY NOTIFICATION SUBSCRIPTIONS (SECTION 5.13.3.1).....</b>	<b>86</b>
<b>D.23</b>	<b>CREATE DELIVERY NOTIFICATION SUBSCRIPTION (SECTION 5.13.5.1) .....</b>	<b>87</b>
<b>D.24</b>	<b>READ DELIVERY NOTIFICATION SUBSCRIPTION (SECTION 5.14.3.1) .....</b>	<b>88</b>
<b>D.25</b>	<b>DELETE SUBSCRIPTION FOR A CLIENT (SECTION 5.14.6.1) .....</b>	<b>88</b>
<b>D.26</b>	<b>NOTIFY CLIENT ABOUT MESSAGE DELIVERY STATUS (SECTION 5.15.5.1).....</b>	<b>88</b>
<b>APPENDIX E.</b>	<b>PARLAY X OPERATIONS MAPPING (INFORMATIVE) .....</b>	<b>90</b>

## Figures

<b>Figure 1:</b>	<b>Resource structure defined by this specification .....</b>	<b>14</b>
<b>Figure 2:</b>	<b>Send SMS and check the delivery status .....</b>	<b>29</b>
<b>Figure 3:</b>	<b>Inbound SMS message delivery (push mode) .....</b>	<b>30</b>

---

Figure 4: Inbound SMS message delivery (polling mode).....31

## Tables

Table 1: Parlay X operations mapping .....90

# 1. Scope

This specification defines a RESTful Short Messaging API using an HTTP protocol binding, based on the similar API defined in [3GPP 29.199-4].

## 2. References

### 2.1 Normative References

- [3GPP 29.199-4] 3GPP Technical Specification, “Open Service Access (OSA); Parlay X Web Services; Part 4: Short messaging (Release 8)”, URL:<http://www.3gpp.org/>
- [OMA\_REST\_TS\_Common] “Common definitions and specifications for OMA REST interfaces”, Open Mobile Alliance™, OMA-TS\_REST\_Common-V1\_0, URL: <http://www.openmobilealliance.org/>
- [REST\_TS\_Common] “RESTful bindings for Parlay X Web Services – Common”, Open Mobile Alliance™, OMA-TS-ParlayREST\_Common-V1, URL:<http://www.openmobilealliance.org/>
- [RFC2119] “Key words for use in RFCs to Indicate Requirement Levels”, S. Bradner, March 1997, URL:<http://www.ietf.org/rfc/rfc2119.txt>
- [RFC2616] “Hypertext Transfer Protocol -- HTTP/1.1”, R. Fielding et. al, January 1999, URL:<http://www.ietf.org/rfc/rfc2616.txt>
- [RFC4234] “Augmented BNF for Syntax Specifications: ABNF”. D. Crocker, Ed., P. Overell. October 2005, URL:<http://www.ietf.org/rfc/rfc4234.txt>
- [RFC4627] “The application/json Media Type for JavaScript Object Notation (JSON)”, D. Crockford, July 2006, URL: <http://www.ietf.org/rfc/rfc4627.txt>
- [SCRRULES] “SCR Rules and Procedures”, Open Mobile Alliance™, OMA-ORG-SCR\_Rules\_and\_Procedures, URL:<http://www.openmobilealliance.org/>
- [W3C-URLENC] W3C HTML 2.0 Specification, form-urlencoded Media Type, URL: [http://www.w3.org/MarkUp/html-spec/html-spec\\_8.html#SEC8.2.1](http://www.w3.org/MarkUp/html-spec/html-spec_8.html#SEC8.2.1)
- [XMLSchema1] W3C Recommendation, XML Schema Part 1: Structures Second Edition, URL: <http://www.w3.org/TR/xmlschema-1/>
- [XMLSchema2] W3C Recommendation, XML Schema Part 2: Datatypes Second Edition, URL: <http://www.w3.org/TR/xmlschema-2/>

### 2.2 Informative References

- [OMADICT] “Dictionary for OMA Specifications”, Version 2.8, Open Mobile Alliance™, OMA-ORG-Dictionary-V2\_8, URL:<http://www.openmobilealliance.org/>
- [REST\_WP] “White Paper on Guidelines for ParlayREST API specifications”, Open Mobile Alliance™, OMA-WP-Guidelines\_for\_ParlayREST\_API\_specifications, URL:<http://www.openmobilealliance.org/>

## 3. Terminology and Conventions

### 3.1 Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except “Scope” and “Introduction”, are normative, unless they are explicitly indicated to be informative.

### 3.2 Definitions

For the purpose of this TS, all definitions from the OMA Dictionary apply [OMADICT].

### 3.3 Abbreviations

<b>API</b>	Application Programming Interface
<b>EMS</b>	Enhanced Message Service
<b>HTTP</b>	HyperText Transfer Protocol
<b>ISDN</b>	Integrated Services Digital Network
<b>JSON</b>	JavaScript Object Notation
<b>MIME</b>	Multipurpose Internet Mail Extensions
<b>MSISDN</b>	Mobile Subscriber ISDN Number
<b>OMA</b>	Open Mobile Alliance
<b>REST</b>	REpresentational State Transfer
<b>SCR</b>	Static Conformance Requirements
<b>SMS</b>	Short Message Service
<b>SMSC</b>	Short Message Service Center
<b>TS</b>	Technical Specification
<b>URI</b>	Uniform Resource Identifier
<b>URL</b>	Uniform Resource Locator
<b>WAP</b>	Wireless Application Protocol
<b>XML</b>	eXtensible Markup Language
<b>XSD</b>	XML Schema Definition

## 4. Introduction

The ParlayREST Technical Specification for SMS contains the HTTP protocol binding for the Parlay X Short Messaging Web Services specification, using the REST architectural style. The specification provides resource definitions, the HTTP verbs applicable for each of these resources, and the element data structures, as well as support material including flow diagrams and examples using the various supported message body formats (i.e. XML, JSON, and form-urlencoded).

### 4.1 Version 1.0

Version 1.0 of the Short Messaging Service ParlayREST API specification supports the following operations:

- Send text message to a terminal
- Check delivery status of the outgoing message
- Check incoming messages (polling mode)
- Create subscriptions for notifications for inbound messages based on given criteria (online)
- Delete subscriptions for notifications for inbound messages (online)
- Create subscriptions for notifications for outbound messages based on given criteria (online)
- Delete subscriptions for notifications for outbound messages (online)
- Retrieve message content
- Confirm message retrieval by deleting message (execute delete command)

### 4.2 Version 1.1

Version 1.1 of the Short Messaging ParlayREST API specification is a maintenance release.

## 5. Short Messaging Service (SMS) API definition

This section is organized to support a comprehensive understanding of the SMS API design. It specifies the definition of all resources, definition of all data structures, and definitions of all operations permitted on the specified resources.

The terms “inbound” and “outbound” used in resource names and data structures refer to incoming, respectively outgoing messages from the client of the API perspective. The term “subscription” refers to the online creation of resources (using requests in this specification). The term “registration” refers to the offline creation of resources using mechanisms out of scope of this specification. The resources created during registrations as well as subscriptions can generate notifications, for example about the delivery status of outgoing SMSs (subscription), or about incoming messages (registration).

Common data types, naming conventions, fault definitions and namespaces are defined in [REST\_TS\_Common] resp. [OMA\_REST\_TS\_Common].

The remainder of this document is structured as follows:

Section 5 starts with a table listing all the resources (and their URL) used by this API, along with the data structure and the supported HTTP verbs (section 5.1). What follows are the data structures (section 5.2). A sample of typical use cases is included in section 5.3, described as high level flow diagrams.

The remaining subsections in section 5 contain the detailed specification for each of the resources. Each such subsection defines the resource, the request URI variables that are common for all HTTP commands, the possible HTTP response codes, and the supported HTTP verbs. For each supported HTTP verb, a description of the functionality is provided, along with an example of a request and an example of a response. For each unsupported HTTP verb, the returned HTTP error status is specified, as well as what should be returned in the Allow header.

All examples in section 5 use XML as the format for the message body. Form-urlencoded examples are provided in Appendix C, while JSON examples are provided in Appendix D. Appendix B provides the Static Conformance Requirements (SCR).

Finally, Appendix E lists the Parlay X equivalent method for each supported ParlayREST resource and method combination, where applicable.


For requests and responses that have a body, the following applies: in the requests received, the server SHALL support JSON and XML encoding of the parameters in the body, and MAY support www-form-urlencoded parameters in the body. The Server SHALL return either JSON or XML encoded parameters in the response body, according to the result of the content type negotiation as specified in [OMA\_REST\_TS\_Common]. In notifications to the Client, the server SHALL use either XML or JSON encoding, depending on which format the client has specified in the related subscription.

Note: Throughout this document client and application can be used interchangeably.

### 5.1 Resources Summary

This section summarizes all the resources used by the SMS API. The resources are defined with the goal of supporting unified messaging, to allow their re-use by other APIs.

The figure below visualizes the resource structure defined by this specification. Note that those nodes in the resource tree which have associated HTTP methods defined in this specification are depicted by solid boxes.

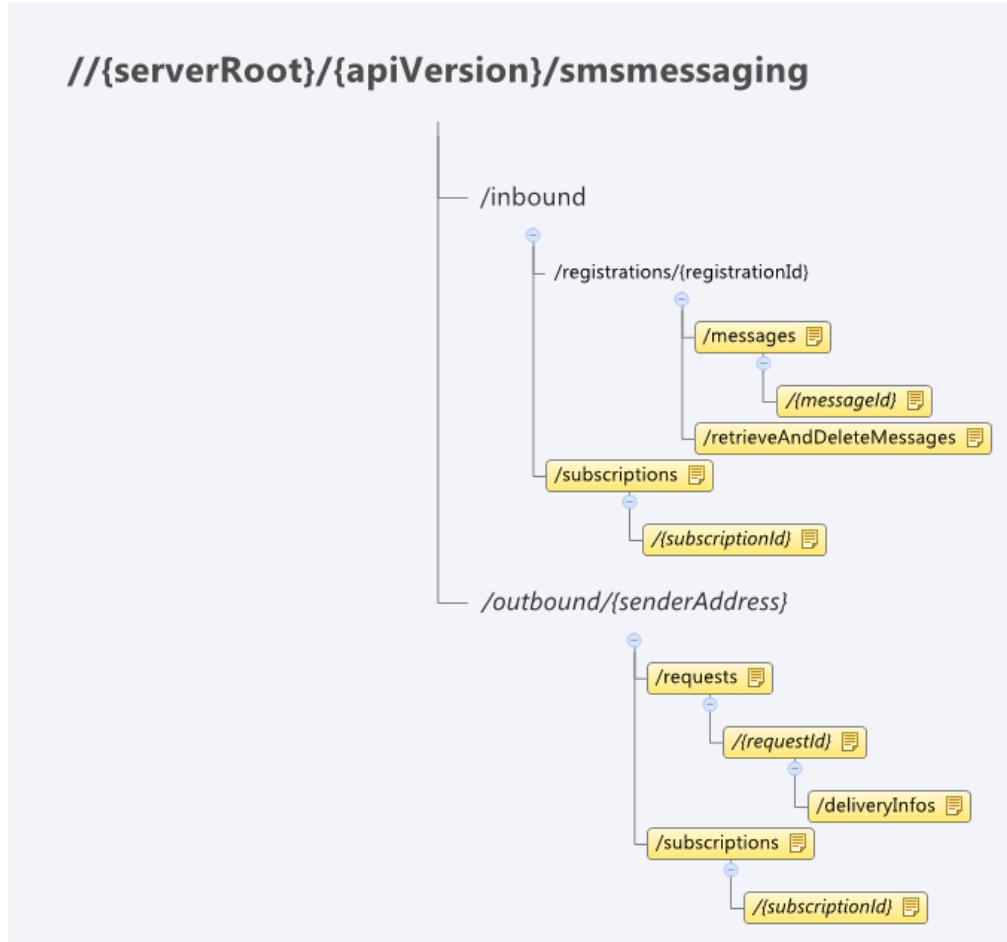

**Figure 1: Resource structure defined by this specification**

The following tables give a detailed overview of the resources defined in this specification, the data type of their representation and the allowed HTTP methods.

**Purpose: Inbound messages for periodic polling (based on a provisioning step configuration)**

Resource	URL Base URL: http://{serverRoot}/{apiVersion}/smsmessaging	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Inbound SMS messages requests for a given registration	/inbound/registrations/{registrationId}/messages  Note: Used by clients that periodically poll for incoming messages. Retrieval criteria have to be provisioned in advance.	InboundSMSMessageList	read one or more messages from gateway storage	no	no	no
Inbound SMS messages Retrieve and Delete using registration	/inbound/registrations/{registrationId}/retrieveAndDeleteMessages	InboundSMSMessageList (used for POST response)  InboundSMSMessageRetrieveAndDeleteRequest (used for POST request)	no	no	pops one or more messages from the gateway storage (removes it if successful)	no
Inbound SMS message for a given registration	/inbound/registrations/{registrationId}/messages/{messageId}	InboundSMSMessage	read one message from gateway storage	no	no	delete one message from gateway storage  Note: Messages are automatically deleted after a certain time.

**Purpose: Subscriptions Management for Inbound Messages**

Resource	URL Base URL: http://{serverRoot}/{apiVersion}/smsmessaging	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Inbound SMS message subscriptions	/inbound/subscriptions	SubscriptionList (used for GET)  Subscription (used for POST)  common:ResourceReference (optional alternative for POST response)	read all active subscriptions	no	create new message subscription	no
Individual inbound SMS message subscription	/inbound/subscriptions/{subscriptionId}	Subscription	read individual subscription	no	no	removes subscription and stops corresponding message notifications

**Purpose: Callback notifications for Inbound messages**

Resource	URL <specified by the client>	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Client notification about inbound SMS message	<specified by the client when subscription is created or during provisioning process>	InboundSMSMessageNotification	no	no	notifies client about new inbound message	no

**Purpose: Sending SMS and obtaining the Delivery Status**

Resource	URL Base URL: http://{serverRoot}/{apiVersion}/smsmessaging	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Outbound SMS message requests	/outbound/{senderAddress}/requests	OutboundSMSMessageRequestList (used for GET)  OutboundSMSMessageRequest (used for POST)  common:ResourceReference (optional alternative for POST response)	read all pending outbound message requests	no	create new outbound messages request	no
Outbound SMS message request and delivery status	/outbound/{senderAddress}/requests/{requestId}	OutboundSMSMessageRequest	read a certain sent SMS message, including the deliveryStatus	no	no	no
Outbound SMS message delivery status	/outbound/{senderAddress}/requests/{requestId}/deliveryInfos	DeliveryInfoList	read delivery status for the individual outbound message	no	no	no

**Purpose: Subscription Management for Outbound Message Delivery Status**

Resource	URL Base URL: http://{serverRoot}/{apiVersion}/smsmessaging	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Outbound SMS message delivery notification subscriptions	/outbound/{senderAddress}/subscriptions	DeliveryReceiptSubscriptionList (used for GET)  DeliveryReceiptSubscription (used for POST)  common:ResourceReference (optional alternative for POST response)	read all outbound SMS subscriptions	no	create new delivery receipt subscription	no

Resource	URL Base URL: http://{serverRoot}/{apiVersion}/smsmessaging	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Individual outbound SMS message delivery notification subscription	/outbound/{senderAddress}/subscriptions/{subscriptionId}	DeliveryReceiptSubscription	read an individual outbound SMS subscription	no	no	remove subscription and stop corresponding delivery receipt notifications

#### Purpose: Callback notifications for Outbound Message Delivery Status

Resource	URL <specified by the client>	Data Structures	HTTP verbs			
			GET	PUT	POST	DELETE
Client notification about outbound SMS message delivery status	<specified by the client when outbound request is submitted>	DeliveryInfoNotification	no	no	notifies client about delivery status of outgoing requests	no

## 5.2 SMS ParlayREST API Data Structures

The namespace for the ShortMessaging data types is:

urn:oma:xml:rest:sms:1

The 'xsd' namespace is used in the present document to refer to the XML Schema data types defined in XML Schema [XMLSchema1, XMLSchema2]. The 'common' namespace is used in the present document to refer to the data types defined in [REST\_TS\_Common]. The use of the names 'xsd' and 'common' is not semantically significant.

### 5.2.1 Type: InboundSMSMessageList

List of inbound SMS messages.

Element	Type	Optional	Description
inboundSMSMessage	InboundSMSMessage [0..unbounded]	Yes	It may contain an array of messages received according to the specified registrationId.
totalNumberOfPendingMessages	xsd:int	Yes	Total number of messages in the gateway storage waiting for retrieval

			at the time of the request
numberOfMessagesInThisBatch	xsd:int	Yes	Number of the messages included in the response (part of the totalNumberOfPendingMessages)
resourceURL	xsd:anyURI	No	Self referring URL

A root element named inboundSMSMessageList of type InboundSMSMessageList is allowed in request and/or response bodies.

## 5.2.2 Type: InboundSMSMessage

Individual inbound SMS message.

Element	Type	Optional	Description
destinationAddress	xsd:anyURI	No	Number associated with the invoked Message service, i.e. the destination address used by the terminal to send the message.
senderAddress	xsd:anyURI	No	Indicates message senderAddress.
message	xsd:string	No	Text of the message
dateTime	xsd:dateTime	Yes	Time when message was received by operator
resourceURL	xsd:anyURI	Yes	Self referring URL. The resourceURL SHALL NOT be included in POST requests by the client, but MUST be included in POST requests representing notifications by the server to the client, when a complete representation of the resource is embedded in the notification. The resourceURL MUST be also included in responses to any HTTP method that returns an entity body, and in PUT requests.
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship with the resource
messageld	xsd:string	Yes	OPTIONAL server-generated message Identifier

A root element named inboundSMSMessage of type InboundSMSMessage is allowed in response bodies.

## 5.2.3 Type: InboundSMSMessageNotification

Notification about an inbound SMS message.

Element	Type	Optional	Description
callbackData	xsd:string	Yes	CallbackData as passed by the

			application during the associated Send SMS operation. See [REST_TS_Common].
inboundSMSMessage	InboundSMSMessage	No	SMS message
link	common:Link[0..unbounded]	Yes	Link to other resources. For example we can have a link to the original outbound message request.

A root element named inboundSMSMessageNotification of type InboundSMSMessageNotification is allowed in request and/or response bodies.

## 5.2.4 Type: SubscriptionList

List of subscriptions to notifications about inbound SMS messages.

Element	Type	Optional	Description
subscription	Subscription[0..unbounded]	Yes	It may contain an array of Subscription
resourceURL	xsd:anyURI	No	Self referring URL

A root element named subscriptionList of type SubscriptionList is allowed in response bodies.

## 5.2.5 Type: Subscription

Individual subscription to notifications about inbound SMS messages.

Element	Type	Optional	Description
callbackReference	common:CallbackReference	No	Client's Notification URL and OPTIONAL callbackData
destinationAddress	xsd:anyURI [1..unbounded]	No	the destination address of the short message
criteria	xsd:string	Yes	The text to match against to determine the application to receive the notification.  This text is matched against the first word, as defined as the initial characters after discarding any leading Whitespace and ending with a Whitespace or end of the string. The matching shall be case-insensitive.
clientCorrelator	xsd:string	Yes	A correlator that the client MAY use to tag this particular resource representation during a request to create a resource on the server. In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In

			case the field is not present, the server SHALL NOT generate it.
resourceURL	xsd:anyURI	Yes	Self referring URL. The resourceURL SHALL NOT be included in POST requests by the client, but POST requests representing notifications by the server to the client, when a complete representation of the resource is embedded in the notification. The resourceURL MUST also be included in responses to any HTTP method that returns an entity body, and in PUT requests.
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship with the resource

A root element named subscription of type Subscription is allowed in request and/or response bodies.

Note that the clientCorrelator is used for purposes of error recovery as specified in [REST\_TS\_Common], and internal client purposes. The server is NOT REQUIRED to use the clientCorrelator value in any form in the creation of the URL of the resource. The specification [REST\_TS\_Common] provides a recommendation regarding the generation of the value of this field.

## 5.2.6 Type: InboundSMSMessageRetrieveAndDeleteRequest

Parameters of the request to retrieve and delete SMS messages in one operation.

Element	Type	Optional	Description
retrievalOrder	RetrievalOrder	Yes	Specifies order in which messages should be retrieved if there are more than one pending
maxBatchSize	xsd:int	Yes	Specifies maximum number of messages to be returned in the response

A root element named \_inboundSMSMessageRetrieveAndDeleteRequest of type InboundSMSMessageRetrieveAndDeleteRequest is allowed in request and/or response bodies.

## 5.2.7 Type: OutboundSMSMessageRequestList

List of outbound SMS message requests.

Element	Type	Optional	Description
outboundSMSMessageRequest	OutboundSMSMessageRequest [0..unbounded]	Yes	The messages that have been sent by the API Consumer and still exist in the server (and hence the messages that can be accessed by the API Consumer).  Messages exist in the server for a little time after reaching their final Delivery Status

resourceURL	xsd:anyURI	No	Self referring URL
-------------	------------	----	--------------------

A root element named outboundSMSMessageRequestList of type OutboundSMSMessageRequestList is allowed in response bodies.

## 5.2.8 Type: OutboundSMSMessageRequest

Individual outbound SMS message request.

Element	Type	Optional	Description
address	xsd:anyURI [1..unbounded]	No	Destination addresses for the Message.
senderAddress	xsd:anyURI	No	The address of the sender to whom a responding message may be sent. If the address is in the form of an MSISDN, it MUST include the protocol prefix 'tel' and '%3A%2B' followed by the country code before the subscriber number; e.g. tel%3A%2B1-555-555-0100.  If senderAddress is also part of the request URL, the two MUST have the same value.
senderName	xsd:string	Yes	Name of the sender to appear on the user's terminal as the originator of the message.  If this parameter is used, a set of allowed values shall be set during provisioning each sender (i.e.: for each User provisioned in the System).
charging	common:Charging Information	Yes	Charging to apply to this message.
receiptRequest	common:CallbackReference	Yes	It defines the application endpoint and OPTIONAL callbackData that will be used to notify the application when the message has been delivered to terminal or if delivery is impossible.
outboundSMSTextMessage	OutboundSMSTextMessage	Choice	Included if a SMSText is being Sent.
outboundSMSBinaryMessage	OutboundSMSBinaryMessage	Choice	Included if a SMSBinary is being Sent.
outboundSMSLogoMessage	OutboundSMSLogoMessage	Choice	Included if a SMSLogo is being Sent.
outboundSMSRingToneMessage	OutboundSMSRingToneMes	Choice	Included if a SMSRingtone is being

	sage		Sent.
clientCorrelator	xsd:string	Yes	<p>A correlator that the client can use to tag this particular resource representation during a request to create a resource on the server.</p> <p>This field SHOULD be present. Note: this allows the client to recover from communication failures during resource creation and therefore avoids re-sending the message in such situations.</p> <p>In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In case the field is not present, the server SHALL NOT generate it.</p>
resourceURL	xsd:anyURI	Yes	<p>Self referring URL. The resourceURL SHALL NOT be included in POST requests by the client, but MUST be included in POST requests representing notifications by the server to the client, when a complete representation of the resource is embedded in the notification. The resourceURL,MUST be also included in responses to any HTTP method that returns an entity body, and in PUT requests.</p>
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship with the resource
deliveryInfoList	DeliveryInfoList	Yes	The Delivery Information (filled in by the server)

XSD modelling use a “choice” to select either a SMSText, a SMSBinary, a SMSLogo or a SMSRingTone.

Note: SMSBinary is supported in order to facilitate legacy applications that may send SMS in binary format (e.g. using SMPP). Underlying implementations need to be aware whether SMSCs and/or final destination mobile phones can handle such messages without unforeseen side effects. Implementations MUST support Service Provider policies to accept or reject the handling of a binarySMS message (POL0001: Policy error SHALL be used in case the message is rejected, see [REST\_TS\_Common]).

A root element named outboundSMSMessageRequest of type OutboundSMSMessageRequest is allowed in request and/or response bodies.

Regarding the clientCorrelator field, the note in section 5.2.5 applies.

## 5.2.9 Type: OutboundSMSTextMessage

Content of an outbound textual SMS message.

Element	Type	Optional	Description
message	xsd:string	No	Short message content.

## 5.2.10 Type: OutboundSMSBinaryMessage

Content of an outbound binary SMS message.

Element	Type	Optional	Description
message	xsd:base64Binary	No	Short message content in binary format.

## 5.2.11 Type: OutboundSMSLogoMessage

Content of an outbound SMS Logo message.

Element	Type	Optional	Description
image	xsd:base64Binary	No	The image in jpeg, gif or png format. The image will be scaled to the proper format
smsFormat	SMSFormat	No	Conversion to be applied to the message prior to delivery. Possible values are: 'Ems' or 'SmartMessaging'

## 5.2.12 Type: OutboundSMSRingToneMessage

Content of an outbound SMS Ringtone message.

Element	Type	Optional	Description
ringTone	xsd:string	No	The ring tone in RTX format.  Note: In the RTX Ring tone Specification, an RTX file is a text file, containing the ring tone name, a control subclause and a subclause containing a comma separated sequence of ring tone commands.
smsFormat	SmsFormat	No	Conversion to be applied to the message prior to delivery. Possible values are: 'Ems' or 'SmartMessaging'

## 5.2.13 Type: DeliveryInfoList

List of delivery information records for an outbound SMS request.

Element	Type	Optional	Description
resourceURL	xsd:anyURI	No	Self referring URL
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship with the resource.
deliveryInfo	DeliveryInfo[1...unbounded]	No	Delivery Information

A root element named deliveryInfoList of type DeliveryInfoList is allowed in request and/or response bodies.

## 5.2.14 Type: DeliveryInfoNotification

Notification about changes in the delivery information of an outbound SMS request.

Element	Type	Optional	Description
callbackData	xsd:string	Yes	CallbackData if passed by the application in the receiptRequest element during the associated Send SMS operation. See [REST_TS_Common].
deliveryInfo	DeliveryInfo[1...unbounded]	No	Delivery Information
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship to the current resource. For example we can have a link to the original outbound message request.

A root element named deliveryInfoNotification of type DeliveryInfoNotification is allowed in request and/or response bodies.

## 5.2.15 Type: DeliveryInfo

Delivery information of an outbound SMS request regarding one recipient address.

Element	Type	Optional	Description
address	xsd:anyURI	No	Outbound message destination address
deliveryStatus	DeliveryStatus	No	Indicates the delivery result for the destination address.
description	xsd:string	Yes	Used together with Delivery Status (e.g.DeliveryImpossible) to provide additional information.
link	common:Link[0..unbounded]	Yes	Links to other resources that are in relationship with the resource. For example we can have a link to the original outbound message request.

## 5.2.16 Type: DeliveryReceiptSubscriptionList

List of subscriptions to notifications about changes in the delivery information of an outbound SMS request.

Element	Type	Optional	Description
resourceURL	xsd:anyURI	No	Self referring URL
link	common:Link[0..unbounded]	Yes	Link to other resources that are in relationship with the resource
deliveryReceiptSubscription	DeliveryReceiptSubscription[0...unbounded]	Yes	Delivery Subscription Information

A root element named deliveryReceiptSubscriptionList of type DeliveryReceiptSubscriptionList is allowed in request and/or response bodies.

## 5.2.17 Type: DeliveryReceiptSubscription

Individual subscription to notifications about changes in the delivery information of an outbound SMS request.

Element	Type	Optional	Description
callbackReference	common:CallbackReference	No	Notification endpoint definition
filterCriteria	xsd:string	No	The FilterCriteria will allow the service to filter flexibly. One example would be for the Service Provider to filter based on first 4 digits in MSISDN. This however is implementation specific and will be left to the Service Provider.
clientCorrelator	xsd:string	Yes	A correlator that the client MAY use to tag this particular resource representation during a request to create a resource on the server. In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In case the field is not present, the server SHALL NOT generate it.
resourceURL	xsd:anyURI	Yes	Self referring URL. The resourceURL SHALL NOT be included in POST requests by the client, but MUST be included in POST requests representing notifications by the server to the client, when a complete representation of the resource is embedded in the notification. The resourceURL, MUST be also included in responses to any HTTP method that returns an entity body, and in PUT requests.
link	common:Link[0..unbounded]	Yes	Link to other resources that are in relationship with the resource.

A root element named deliveryReceiptSubscription of type DeliveryReceiptSubscription is allowed in request and/or response bodies.

Regarding the clientCorrelator field, the note in section 5.2.5 applies.

## 5.2.18 Enumeration: DeliveryStatus

Delivery status enumeration.

Enumeration	Description

DeliveredToTerminal	Successful delivery to Terminal.
DeliveryUncertain	Delivery status unknown: e.g. because it was handed off to another network.
DeliveryImpossible	Unsuccessful delivery; the message could not be delivered before it expired.
MessageWaiting	The message is still queued for delivery. This is a temporary state, pending transition to one of the preceding states.
DeliveredToNetwork	Successful delivery to the network entity responsible for distributing the short message further in the network.
DeliveryNotificationNotSupported	Unable to provide delivery receipt notification. NotifyMessageDeliveryReceipt function will provide DeliveryNotificationNotSupported to indicate that delivery receipt for the specified address in a SendMessageRequest is not supported.

### 5.2.19 Enumeration: SmsFormat

SMS format enumeration.

Enumeration	Description
Ems	EMS conversion
SmartMessaging	SmartMessaging conversion

### 5.2.20 Enumeration: RetrievalOrder

Retrieval order enumeration.

Enumeration	Description
OldestFirst	Retrieve in the order from oldest to newest
NewestFirst	Retrieve in the order from newest to oldest

### 5.2.21 Values of the Link “rel” attribute

The “rel” attribute of the Link element is a free string set by the server implementation, to indicate a relationship between the current resource and an external resource. The following are possible strings (list is non-exhaustive, and can be extended):

- InboundSMSMessage
- InboundSMSMessageList
- Subscription
- SubscriptionList
- OutboundSMSMessageRequest
- OutboundSMSMessageRequestList

- DeliveryInfoList
- DeliveryReceiptSubscription
- DeliveryReceiptSubscriptionList

These values indicate the kind of resource that the link points to.


## 5.3 Sequence Diagrams

### 5.3.1 Send SMS and check the delivery status

This figure below shows a scenario for sending a short message and get the delivery status of the message.

The resources:

- To send a short message, create new resource under  
`http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests`
- To get the delivery status of the message, do either a or b:
  - a. read the newly created resource including the delivery status of the message  
`http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests/{requestId}`
  - b. directly read the resource  
`http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests/{requestId}/deliveryInfos`

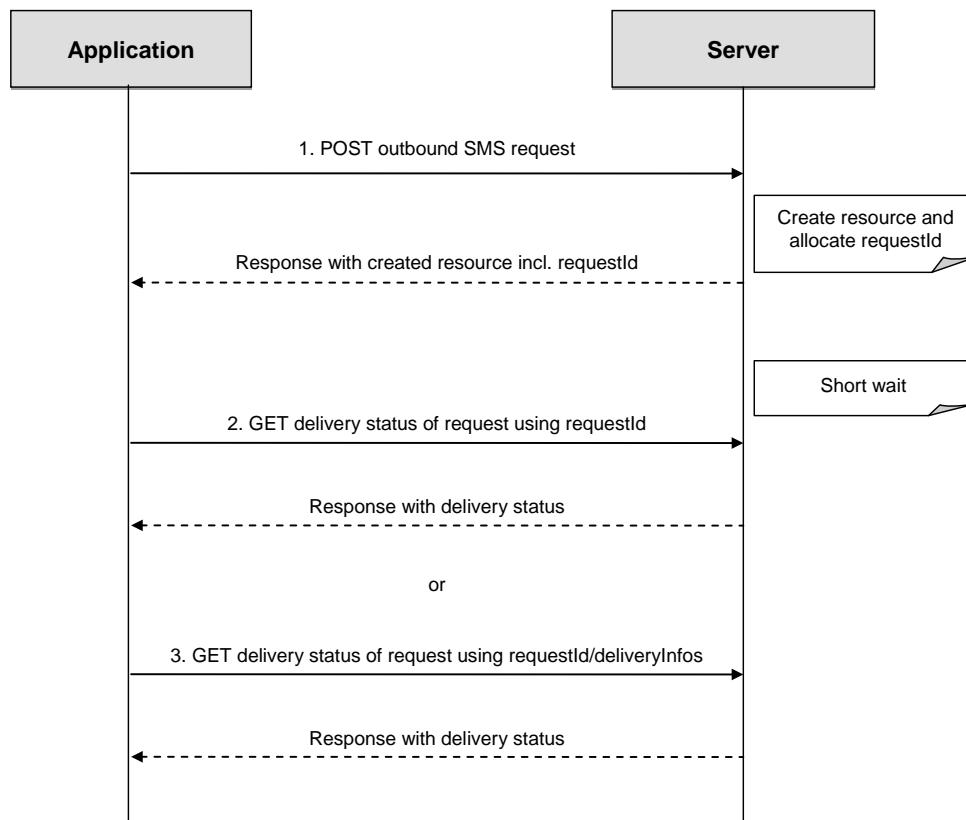

**Figure 2: Send SMS and check the delivery status**

Outline of the flows:


1. An application initiates the creation of new outbound SMS request using POST and receives the created request resource with a resource URL containing the requestId.
2. The application requests the resource of the sent message with the given resource URL (containing the requestId) using GET and optionally gets the delivery status, or
3. The application requests the delivery status of the sent message with the given delivery info list URL using GET and gets the status.

### 5.3.2 Inbound SMS message delivery (push mode)

This figure below shows a scenario for starting notification of inbound SMS with specific criteria on-line and receiving it when the message having the specified criteria arrives.

The resources:

- To start subscription to notifications for inbound SMS messages, create new resource under  
**<http://{serverRoot} /{apiVersion}/smsmessaging/inbound/subscriptions>**
- To notify the application about the message arrival, POST a notification to the client supplied notifyURL
- To stop the subscription to notifications, delete the resource  
**<http://{serverRoot} /{apiVersion}/smsmessaging/inbound/subscriptions/{subscriptionId}>**

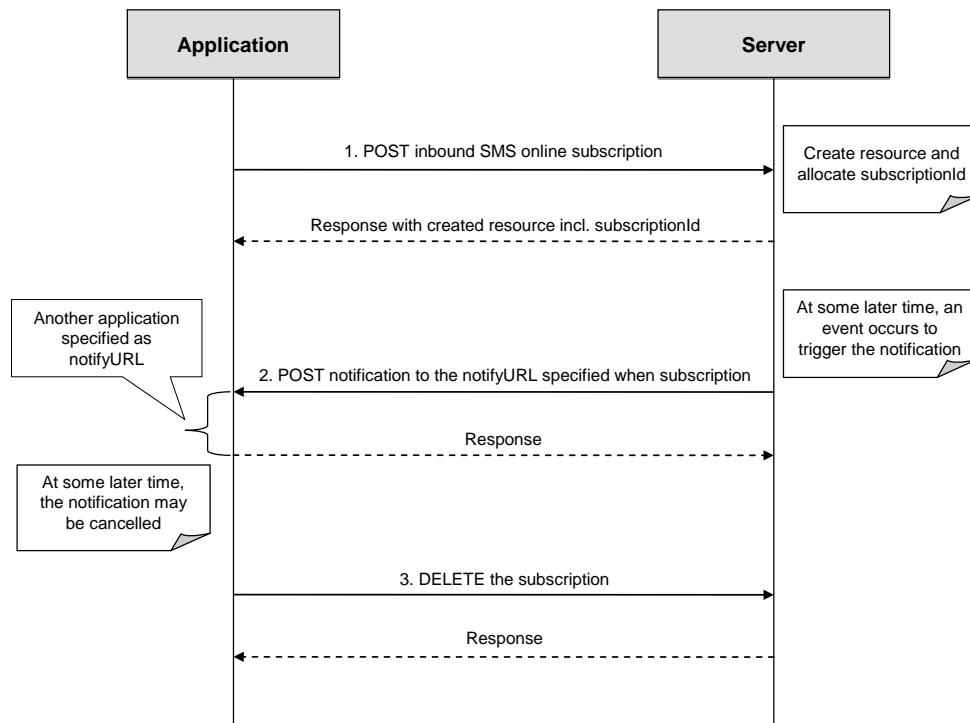

**Figure 3: Inbound SMS message delivery (push mode)**

Outline of the flows:

1. An application subscribes to notifications for inbound messages using POST and receives the resulting resourceURL containing the subscriptionId.
2. When the message which satisfies the specified criteria arrives, the REST service notifies the application of the incoming message using POST so that the application receives the message.
3. The application stops the notification subscription using DELETE with a resource URL containing the subscriptionId.

### 5.3.3 Inbound SMS message delivery (polling mode)

This figure below shows a scenario for checking for incoming messages using retrieval criteria that are set up offline, and deleting one message from the gateway storage.

The resources:

- To retrieve incoming messages satisfying the criteria set up in advance, get the resource

<http://{serverRoot}/{apiVersion}/smsmessaging/inbound/registrations/{registrationId}/messages>

- To remove one message from the storage, delete the resource

<http://{serverRoot}/{apiVersion}/smsmessaging/inbound/registrations/{registrationId}/messages/{messageId}>

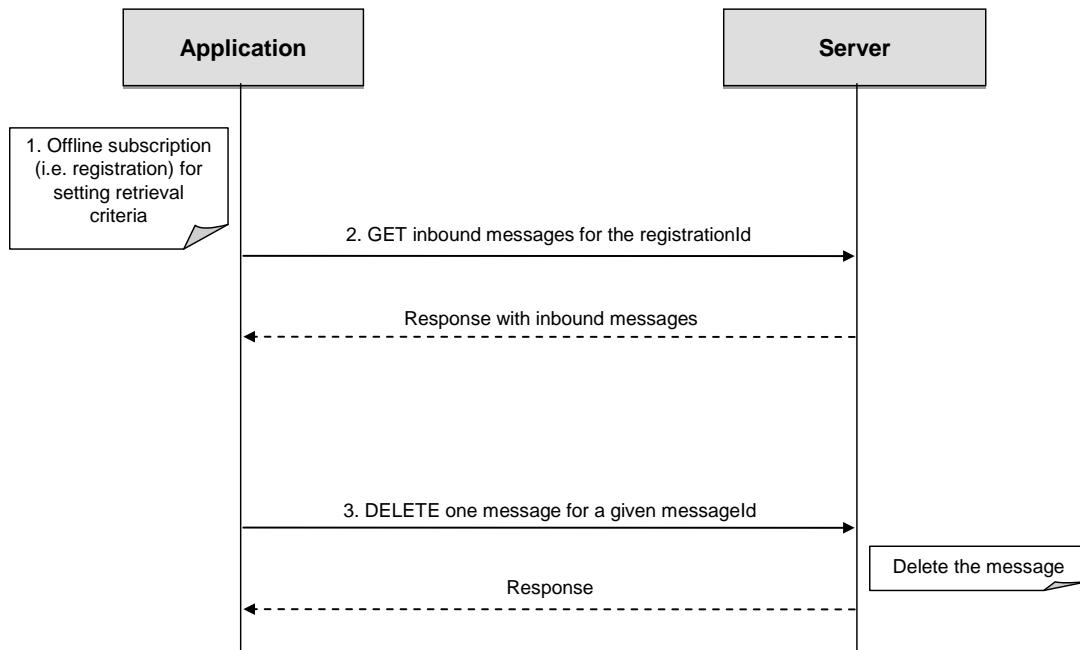


Figure 4: Inbound SMS message delivery (polling mode)

Outline of the flows:

1. In advance, the notification of SMS reception with specific criteria is registered offline.
2. An application requests the list of the incoming messages fulfilling specified criteria using GET with a resource URL containing the registrationId and receives the messages.
3. The application removes one of the messages from gateway storage using DELETE with a resource URL containing the messageId .

## 5.4 Resource: Inbound SMS message requests for a given registration

The resource used is:

`http://{serverRoot}/{apiVersion}/smsmessaging/inbound/registrations/{registrationId}/messages`

This resource is used for checking for incoming messages using a retrieval criterion that is setup in advance for a particular client (offline - during provisioning process: sms short codes, etc).

### 5.4.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API clients want to use (e.g. 1 for version 1.x)
registrationId	reference to the off-line retrieval criteria provisioned in advance and known to the client application. Analogous to ParlayX registrationIdentifier

### 5.4.2 Response Codes

#### 5.4.2.1 Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

#### 5.4.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

### 5.4.3 GET

This operation is used for reliable inbound message delivery for the particular client. Messages will remain on the server until client will confirm successful retrieval by executing DELETE command for each individual message (see DELETE on Inbound SMS message).

Request URL parameters are:

Name	Type/Values	Optional	Description
maxBatchSize	xsd:int	Yes	Specifies maximum number of messages to be returned in the response
retrievalOrder	RetrievalOrder	Yes	Specifies order in which messages should be retrieved if there are more than one pending

#### 5.4.3.1 Example 1: regular request

(Informative)

##### 5.4.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=2 HTTP/1.1
Accept: application/xml
```

Host: example.com

#### 5.4.3.1.2 Response

HTTP/1.1 200 OK  
Content-Type: application/xml  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:inboundSMSMessageList xmlns:sms="urn:oma:xml:rest:sms:1">
  <inboundSMSMessage>
    <destinationAddress>tel:+15555550120</destinationAddress>
    <senderAddress>tel:+15555550121</senderAddress>
    <message>First simple message</message>
    <dateTime>2009-11-19T12:00:00</dateTime>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001
    </resourceURL>
    <messageId>msg001</messageId>
  </inboundSMSMessage>
  <inboundSMSMessage>
    <destinationAddress>tel:+15555550122</destinationAddress>
    <senderAddress>tel:+15555550123</senderAddress>
    <message>Second simple message</message>
    <dateTime>2009-11-19T12:00:00</dateTime>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg002
    </resourceURL>
    <messageId>msg002</messageId>
  </inboundSMSMessage>
  <!-- further instances of InboundSMSMessage if needed -->
  <totalNumberOfPendingMessages>20</totalNumberOfPendingMessages>
  <numberOfMessagesInThisBatch>2</numberOfMessagesInThisBatch>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages</resourceURL>
</sms:inboundSMSMessageList>
```

#### 5.4.3.2 Example 2: maxBatchSize exceeding the allowed size (Informative)

##### 5.4.3.2.1 Request

GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=5000 HTTP/1.1  
Accept: application/xml  
Host: example.com

##### 5.4.3.2.2 Response

HTTP/1.1 400 Bad Request  
Content-Type: application/xml  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```

<?xml version="1.0" encoding="UTF-8"?>
<common:requestError xmlns:common="urn:oma:xml:rest:common:1">
  <link rel="InboundSMSMessageList"
    href="http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=5000" />
  <policyException>
    <messageId>POL0001</messageId>
    <text>A policy error occurred. Error code is maxBatchSize exceeded. The maximum allowed maxBatchSize is %1.</text>
    <variables>20</variables>
  </policyException>
</common:requestError>

```

#### 5.4.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

#### 5.4.5 POST

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

#### 5.4.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

### 5.5 Resource: Inbound SMS messages Retrieve and Delete using registration

The resource used is:

**http://{serverRoot}/{apiVersion}/smsmessaging/inbound/registrations/{registrationId}/retrieveAndDeleteMessages**

This resource is used for retrieving and deleting incoming messages using retrieval criteria that is setup in advance (offline - during provisioning process: sms short codes, etc) for a particular client.

#### 5.5.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API clients want to use (e.g. 1 for version 1.x)
registrationId	reference to the off-line retrieval criteria provisioned in advance and known to the client application. Analogous to ParlayX registrationIdentifier

## 5.5.2 Response Codes

### 5.5.2.1 Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.5.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

## 5.5.3 GET

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the 'Allow: POST' field in the response as per section 14.7 of [RFC 2616].

## 5.5.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the 'Allow: POST' field in the response as per section 14.7 of [RFC 2616].

## 5.5.5 POST

This operation retrieves one or more messages from the gateway storage for a particular client. If retrieval is successful, it will delete message from gateway.

Notes: POST is used because resource state would be altered as result of the execution. GET is not a good fit here because it has to be idempotent. Client guidelines:

- 1) Should NOT be used for reliable message delivery (see GET for reliable delivery). This is an optional alternative to the use of GET and DELETE on the .../inbound/registrations resource.
- 2) Default number of messages that would be returned in one batch is controlled by server configuration.
- 3) Messages would be automatically deleted from gateway storage following a successful POST, after a maximum time interval as defined by a service policy.

Parameters are passed in the request body using the InboundSMSMessageRetrieveAndDeleteRequest data structure.

### 5.5.5.1 Example

(Informative)

#### 5.5.5.1.1 Request

```
POST /exampleAPI/1/smsmessaging/inbound/registrations/reg000/retrieveAndDeleteMessages HTTP/1.1
```

```
Accept: application/xml
```

```
Content-Length: nnnn
```

```
Content-Type: application/xml
```

```
Host: example.com
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:inboundSMSMessageRetrieveAndDeleteRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <retrievalOrder>OldestFirst</retrievalOrder>
  <maxBatchSize>3</maxBatchSize>
</sms:inboundSMSMessageRetrieveAndDeleteRequest>
```

### 5.5.5.1.2 Response

HTTP/1.1 200 OK  
Content-Type: application/xml  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:inboundSMSMessageList xmlns:sms="urn:oma:xml:rest:sms:1">
<!-- SMS -->
<inboundSMSMessage>
<destinationAddress>tel:+15555550120</destinationAddress>
<senderAddress>tel:+15555550121</senderAddress>
<message>First simple message</message>
<messageId>msg001</messageId>
<!-- no message resourceURL because SMS will be deleted from server immediately after operation is completed -->
</inboundSMSMessage>
<!-- SMS -->
<inboundSMSMessage>
<destinationAddress>tel:+15555550122</destinationAddress>
<senderAddress>tel:+15555550123</senderAddress>
<message>Second simple message</message>
<messageId>msg002</messageId>
<!-- no message resourceURL because SMS will be deleted from server immediately after operation is completed -->
</inboundSMSMessage>
<totalNumberOfPendingMessages>200</totalNumberOfPendingMessages>
<numberOfMessagesInThisBatch>2</numberOfMessagesInThisBatch>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000</resourceURL>
</sms:inboundSMSMessageList>
```

### 5.5.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.6 Resource: Inbound SMS message for a given registration

The resource used is:

<http://{serverRoot}/{apiVersion}/smsmessaging/inbound/registrations/{registrationId}/messages/{ messageId}>

This resource provides access to individual inbound SMS message stored by gateway. Combination of GET/DELETE is used by clients that are polling incoming messages and require reliable delivery. Each message would have to be deleted separately as a confirmation of successful retrieval.

### 5.6.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API clients want to use (e.g. 1 for version 1.x)
registrationId	reference to the off-line retrieval criteria provisioned in advance and known to the

	client application. Analogous to ParlayX registrationIdentifier
messageld	unique message Identifier generated by server

## 5.6.2 Response Codes

### 5.6.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

## 5.6.3 GET

Read one message from gateway storage. Message is not deleted. Delete command need to be executed to confirm delivery and free resources occupied by the message and associated attachments.

### 5.6.3.1 Example 1: regular request

(Informative)

#### 5.6.3.1.1 Request

This example shows also an alternative way to indicate desired content type in response from the server, by using URL query parameter “?resFormat” which is described in [OMA\_REST\_TS\_Common].

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001?resFormat=XML HTTP/1.1
Host: example.com
```

#### 5.6.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:inboundSMSMessage xmlns:sms="urn:oma:xml:rest:sms:1">
  <destinationAddress>tel:+15555550120</destinationAddress>
  <senderAddress>tel:+15555550121</senderAddress>
  <message>First simple message</message>
  <dateTime>2009-11-19T12:00:00</dateTime>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001
  </resourceURL>
  <messageld>msg001</messageld>
</sms:inboundSMSMessage>
```

### 5.6.3.2 Example 2: invalid (non-existing) messageld

(Informative)

#### 5.6.3.2.1 Request

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001 HTTP/1.1
Accept: application/xml
Host: example.com
```

### 5.6.3.2.2 Response

```
HTTP/1.1 404 Not Found
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<common:requestError xmlns:common="urn:oma:xml:rest:common:1">
  <link rel="InboundSMSMessage"
    href="http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001" />
  <serviceException>
    <messageId>SVC0002</messageId>
    <text>Invalid input value. The requested messageId %1 does not exist.</text>
    <variables>msg001</variables>
  </serviceException>
</common:requestError>
```

## 5.6.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.6.5 POST

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.6.6 DELETE

Confirms message delivery and removes the message from the storage on the gateway.

### 5.6.6.1 Example (Informative)

#### 5.6.6.1.1 Request

```
DELETE /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001 HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.6.6.1.2 Response

```
HTTP/1.1 204 No content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## 5.7 Resource: Inbound SMS message subscriptions

The resource used is: <http://{{serverRoot}}/{{apiVersion}}/smsmessaging/inbound/subscriptions>

This resource gives access to inbound subscriptions for a particular client.

## 5.7.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API clients want to use (e.g. 1 for version 1.x)

## 5.7.2 Response Codes

### 5.7.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.7.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

## 5.7.3 GET

This operation is used to read active subscriptions for the particular client.

### 5.7.3.1 Example

(Informative)

#### 5.7.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.7.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:subscriptionList xmlns:sms="urn:oma:xml:rest:sms:1">
<subscription>
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <destinationAddress>tel:+15555550120</destinationAddress>
  <criteria>Urgent*</criteria>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001</resourceURL>
</subscription>
<subscription>
  <callbackReference>
```

```

<notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
<callbackData>54321</callbackData>
</callbackReference>
<destinationAddress>tel:+15555550121</destinationAddress>
<criteria>Urgent*</criteria>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub002</resourceURL>
</subscription>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions</resourceURL>
</sms:subscriptionList>

```

## 5.7.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.7.5 POST

This operation is used to create a new inbound message subscription for the particular client.

### 5.7.5.1 Example 1: returning a representation of created resource (Informative)

#### 5.7.5.1.1 Request

```

POST /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1
Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: example.com

<?xml version="1.0" encoding="UTF-8"?>
<sms:subscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <destinationAddress>tel:+15555550120</destinationAddress>
  <criteria>Urgent*</criteria>
</sms:subscription>

```

#### 5.7.5.1.2 Response

```

HTTP/1.1 201 Created
Content-Type: application/xml
Location: http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

```

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:subscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
</sms:subscription>

```

```
</callbackReference>
<destinationAddress>tel:+15555550120</destinationAddress>
<criteria>Urgent*</criteria>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001</resourceURL>
</sms:subscription>
```

### 5.7.5.2 Example 2: returning the location of created resource (Informative)

#### 5.7.5.2.1 Request

POST /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1

Accept: application/xml

Content-Type: application/xml

Content-Length: nnnn

Host: example.com

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:subscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <destinationAddress>tel:+15555550120</destinationAddress>
  <criteria>Urgent*</criteria>
</sms:subscription>
```

#### 5.7.5.2.2 Response

HTTP/1.1 201 Created

Content-Type: application/xml

Location: http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001

Content-Length: nnnn

Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<common:resourceReference xmlns:common="urn:oma:xml:rest:common:1">
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001</resourceURL>
</common:resourceReference>
```

## 5.7.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.8 Resource: Individual inbound SMS message subscription

The resource used is:

<http://{serverRoot}/{apiVersion}/smsmessaging/inbound/subscriptions/{subscriptionId}>

This resource controls individual subscription for inbound messages and gives access to individual subscription for a particular client.

## 5.8.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API client wants to use (e.g. 1 for version 1.x)
subscriptionId	identifier of the subscription

## 5.8.2 Response Codes

### 5.8.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.8.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4]

## 5.8.3 GET

This operation is used to read an individual subscription for the particular client.

### 5.8.3.1 Example

(Informative)

#### 5.8.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/inbound/subscriptions/sub001 HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.8.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

<?xml version="1.0" encoding="UTF-8"?>
<sms:subscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <destinationAddress>tel:+15555550120</destinationAddress>
  <criteria>Urgent*</criteria>
```

```
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscription/sub001</resourceURL>
</sms:subscription>
```

## 5.8.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.8.5 POST

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.8.6 DELETE

This operation is used to delete a subscription for the particular client.

### 5.8.6.1 Example (Informative)

#### 5.8.6.1.1 Request

```
DELETE /exampleAPI/1/smsmessaging/inbound/subscriptions/sub000 HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.8.6.1.2 Response

```
HTTP/1.1 204 No content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## 5.9 Resource: Client notification about inbound SMS message

This resource is a client provided callback URL for notification about incoming messages. ParlayREST does not make any assumption about the structure of this URL.

### 5.9.1 Request URI variables

Client provided.

### 5.9.2 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.9.3 GET

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: .’ field in the response as per section 14.7 of [RFC 2616].

## 5.9.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.9.5 POST

This operation is used to notify client about message arrival.

### 5.9.5.1 Example (Informative)

#### 5.9.5.1.1 Request

```
POST /notifications/DeliveryInfoNotification HTTP/1.1
Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: application.example.com
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:inboundSMSMessageNotification xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackData>12345</callbackData>
  <inboundSMSMessage>
    <destinationAddress>tel:+15555550120</destinationAddress>
    <senderAddress>tel:+15555550121</senderAddress>
    <message>First simple message</message>
    <dateTime>2009-11-19T12:00:00</dateTime>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001
    </resourceURL>
    <messageId>msg001</messageId>
  </inboundSMSMessage>
</sms:inboundSMSMessageNotification>
```

#### 5.9.5.1.2 Response

```
HTTP/1.1 204 No Content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## 5.9.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405

## 5.10 Resource: Outbound SMS message requests

The resource used is: **<http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests>**

This resource is used for sending outbound messages.

### 5.10.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API client wants to use (e.g. 1 for version 1.x)
senderAddress	identifies client application. Typically SMS SHORT CODE [OMA_REST_TS_Common]

## 5.10.2 Response Codes

### 5.10.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.10.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

## 5.10.3 GET

This operation is used to retrieve the list of "pending" outgoing requests.

### 5.10.3.1 Example

(Informative)

#### 5.10.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.10.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequestList xmlns:sms="urn:oma:xml:rest:sms:1">
<outboundSMSMessageRequest>
<address>tel:+15555550101</address>
<senderAddress>tel:+15555550151</senderAddress>
<outboundSMSTextMessage>
<message>Let's have a REST.</message>
</outboundSMSTextMessage>
<clientCorrelator>67891</clientCorrelator>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req001</resourceURL>
<deliveryInfoList>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req001/deliveryInfos</resourceURL>
<deliveryInfo>
```

```

<address>tel:+15555550101</address>
<deliveryStatus>DeliveredToNetwork</deliveryStatus>
</deliveryInfo>
</deliveryInfoList>
</outboundSMSMessageRequest>
<outboundSMSMessageRequest>
<address>tel:+15555550102</address>
<address>tel:+15555550103</address>
<senderAddress>tel:+15555550151</senderAddress>
<outboundSMSTextMessage>
<message>Let's have a REST.</message>
</outboundSMSTextMessage>
<clientCorrelator>67892</clientCorrelator>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req002</resourceURL>
<deliveryInfoList>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req002/deliveryInfos
</resourceURL>
<deliveryInfo>
<address>tel:+15555550102</address>
<deliveryStatus>DeliveredToTerminal</deliveryStatus>
</deliveryInfo>
<deliveryInfo>
<address>tel:+15555550103</address>
<deliveryStatus>DeliveredToNetwork</deliveryStatus>
</deliveryInfo>
</deliveryInfoList>
</outboundSMSMessageRequest>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests</resourceURL>
</sms:outboundSMSMessageRequestList>

```

## 5.10.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.10.5 POST

This operation is used to create outgoing message request.

### 5.10.5.1 Example 1: returning representation of created resource in response (Informative)

#### 5.10.5.1.1 Request

```

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: example.com

```

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
<address>tel:+15555550101</address>

```

```

<address>tel:+15555550104</address>
<senderAddress>tel:+15555550151</senderAddress>
<senderName>MyName</senderName>
<receiptRequest> <!-- this is optional -->
  <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
</receiptRequest>
<outboundSMSTextMessage>
  <message>Example Text Message </message>
</outboundSMSTextMessage>
<clientCorrelator>67893</clientCorrelator>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.1.2 Response

HTTP/1.1 201 Created  
 Content-Type: application/xml  
 Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>Example Text Message </message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
  <deliveryInfoList>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos</resourceURL>
    <deliveryInfo>
      <address>tel:+15555550101</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
    <deliveryInfo>
      <address>tel:+15555550104</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
  </deliveryInfoList>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.2 Example 2: returning location of created resource in response (Informative)

#### 5.10.5.2.1 Request

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1

```

Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: example.com

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>Example Text Message </message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.2.2 Response

```

HTTP/1.1 201 Created
Content-Type: application/xml
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

```

```

<?xml version="1.0" encoding="UTF-8"?>
<common:resourceReference xmlns:common="urn:oma:xml:rest:common:1">
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
</common:resourceReference>

```

### 5.10.5.3 Example 3: serviceException in case of single address or all multiple addresses failure (Informative)

#### 5.10.5.3.1 Request

```

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: example.com

```

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->

```

```

<notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
</receiptRequest>
<outboundSMSTextMessage>
  <message>Example Text Message </message>
</outboundSMSTextMessage>
<clientCorrelator>67893</clientCorrelator>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.3.2 Response

HTTP/1.1 400 Bad Request  
Content-Type: application/xml  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```

<?xml version="1.0" encoding="UTF-8"?>
<common:requestError xmlns:common="urn:oma:xml:rest:common:1">
  <serviceException>
    <messageId>SVC0001</messageId>
    <text>A service error occurred. Error code is %1 </text>
    <variables>ERROR-XYZ</variables>
  </serviceException>
</common:requestError>

```

### 5.10.5.4 Example 4: multiple addresses partial success, with deliveryInfoList in (Informative)

#### 5.10.5.4.1 Request

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1  
Accept: application/xml  
Content-Type: application/xml  
Content-Length: nnnn  
Host: example.com

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest><!-- this is optional --&gt;
    &lt;notifyURL&gt;http://application.example.com/notifications/DeliveryInfoNotification&lt;/notifyURL&gt;
  &lt;/receiptRequest&gt;
  &lt;outboundSMSTextMessage&gt;
    &lt;message&gt;Example Text Message &lt;/message&gt;
  &lt;/outboundSMSTextMessage&gt;
  &lt;clientCorrelator&gt;67893&lt;/clientCorrelator&gt;
&lt;/sms:outboundSMSMessageRequest&gt;
</pre>

```

### 5.10.5.4.2 Response

```

HTTP/1.1 201 Created
Content-Type: application/xml
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>Example Text Message </message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
  <deliveryInfoList>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos
  </resourceURL>
    <deliveryInfo>
      <address>tel:+15555550101</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
    <deliveryInfo>
      <address>tel:+15555550104</address>
      <deliveryStatus>DeliveryImpossible</deliveryStatus>
    </deliveryInfo>
  </deliveryInfoList>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.5 Example 5: multiple addresses partial success, without deliveryInfoList in (Informative)

#### 5.10.5.5.1 Request

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1

Accept: application/xml

Content-Length: nnnn

Content-Type: application/xml

Host: example.com

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
</sms:outboundSMSMessageRequest>

```

```
</receiptRequest>
<outboundSMSTextMessage>
  <message>Example Text Message </message>
</outboundSMSTextMessage>
<clientCorrelator>67893</clientCorrelator>
</sms:outboundSMSMessageRequest>
```

### 5.10.5.5.2 Response

Note: In this case, in order to know the result of sending to individual addresses, the delivery status can be obtained using the GET operation with the requestId, or via notifications (if subscribed).

HTTP/1.1 201 Created  
Content-Type: application/xml  
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>Example Text Message </message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
</sms:outboundSMSMessageRequest>
```

### 5.10.5.6 Example 6: using SHORT CODE as senderAddress

(Informative)

#### 5.10.5.6.1 Request

POST /exampleAPI/1/smsmessaging/outbound/72654/requests HTTP/1.1  
Accept: application/xml  
Content-Type: application/xml  
Content-Length: nnnn  
Host: example.com

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>72654</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest> <!-- this is optional -->
```

```

<notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
</receiptRequest>
<outboundSMSTextMessage>
  <message>Example Text Message </message>
</outboundSMSTextMessage>
<clientCorrelator>67893</clientCorrelator>
</sms:outboundSMSMessageRequest>

```

### 5.10.5.6.2 Response

HTTP/1.1 201 Created  
 Content-Type: application/xml  
 Location: http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>72654</senderAddress>
  <senderName>MyName</senderName>
  <receiptRequest><!-- this is optional -->
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>Example Text Message </message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000</resourceURL>
  <deliveryInfoList>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000/deliveryInfos
    </resourceURL>
    <deliveryInfo>
      <address>tel:+15555550101</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
    <deliveryInfo>
      <address>tel:+15555550104</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
  </deliveryInfoList>
</sms:outboundSMSMessageRequest>

```

## 5.10.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.11 Resource: Outbound SMS message request and delivery status

The resource used is: `http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests/{requestId}`

This resource is used to request an outbound SMS request including the message delivery status.

### 5.11.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: <code>http://example.com/exampleAPI</code>
apiVersion	version of the ParlayREST API client wants to use (e.g. 1 for version 1.x)
senderAddress	identifies client application. Typically SMS SHORT CODE [OMA_REST_TS_Common]
requestId	outbound message request Id generated by server

### 5.11.2 Response Codes

#### 5.11.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

#### 5.11.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

### 5.11.3 GET

This operation is used to retrieve an outbound SMS request including the message delivery status.

#### 5.11.3.1 Example (Informative)

##### 5.11.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000 HTTP/1.1
Accept: application/xml
Host: example.com
```

##### 5.11.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```

<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
  <senderAddress>tel:+15555550151</senderAddress>
  <senderName>MyName</senderName>
  <!-- this is optional -->
  <receiptRequest>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  </receiptRequest>
  <outboundSMSTextMessage>
    <message>"sent message"</message>
  </outboundSMSTextMessage>
  <clientCorrelator>67893</clientCorrelator>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
  <deliveryInfoList>
    <!-- this is optional -->
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos
  </resourceURL>
    <deliveryInfo>
      <address>tel:+15555550101</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
    <deliveryInfo>
      <address>tel:+15555550104</address>
      <deliveryStatus>MessageWaiting</deliveryStatus>
    </deliveryInfo>
  </deliveryInfoList>
</sms:outboundSMSMessageRequest>

```

#### 5.11.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

#### 5.11.5 POST

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

#### 5.11.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

### 5.12 Resource: Outbound SMS message delivery status

The resource used is:

**<http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/requests/{requestId}/deliveryInfos>**

This resource is used to request outbound message delivery status.

## 5.12.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API client wants to use (e.g. 1 for version 1.x)
senderAddress	identifies client application. Typically SMS SHORT CODE [OMA_REST_TS_Common]
requestId	outbound message request Id generated by server

## 5.12.2 Response Codes

### 5.12.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.12.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

## 5.12.3 GET

This operation is used to retrieve outgoing message delivery status.

### 5.12.3.1 Example (Informative)

#### 5.12.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.12.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryInfoList xmlns:sms="urn:oma:xml:rest:sms:1">
  <resourceURL>
    http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos
  </resourceURL>
  <deliveryInfo>
    <address>tel:+15555550101</address>
    <deliveryStatus>MessageWaiting</deliveryStatus>
```

```

</deliveryInfo>
<deliveryInfo>
  <address>tel:+15555550104</address>
  <deliveryStatus>MessageWaiting</deliveryStatus>
</deliveryInfo>
</sms:deliveryInfoList>

```

## 5.12.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

## 5.12.5 POST

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

## 5.12.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET’ field in the response as per section 14.7 of [RFC 2616].

# 5.13 Resource: Outbound SMS message delivery notification subscriptions

The resource used is:

**`http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/subscriptions`**

This resource gives access to outbound SMS subscriptions for a particular client.

## 5.13.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: <code>http://example.com/exampleAPI</code>
apiVersion	version of the ParlayREST API clients want to use (e.g. 1 for version 1.x)
senderAddress	identifies client application. Typically SMS SHORT CODE [OMA_REST_TS_Common]

## 5.13.2 Response Codes

### 5.13.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.13.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

## 5.13.3 GET

This operation is used to read all outbound SMS delivery notification subscriptions for the particular client.

### 5.13.3.1 Example

(Informative)

#### 5.13.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.13.3.1.2 Response

```
HTTP/1.1 200 OK
Content-Type: application/xml
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryReceiptSubscriptionList xmlns:sms="urn:oma:xml:rest:sms:1">
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/</resourceURL>
  <deliveryReceiptSubscription>
    <callbackReference>
      <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
      <callbackData>12345</callbackData>
    </callbackReference>
    <filterCriteria>0102</filterCriteria>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000</resourceU
RL>
  </deliveryReceiptSubscription>
  <deliveryReceiptSubscription>
    <callbackReference>
      <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
      <callbackData>54321</callbackData>
    </callbackReference>
    <filterCriteria>0103</filterCriteria>
    <resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000</resourc
eURL>
  </deliveryReceiptSubscription>
</sms:deliveryReceiptSubscriptionList>
```

## 5.13.4 PUT

Method not supported by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.13.5 POST

This operation is used to create a new outbound SMS delivery notification subscription for the particular client.

### 5.13.5.1 Example

(Informative)

#### 5.13.5.1.1 Request

```
POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B1555550151/subscriptions HTTP/1.1
```

Accept: application/xml

Content-Type: application/xml

Content-Length: nnnn

Host: example.com

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryReceiptSubscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <filterCriteria>0102</filterCriteria>
</sms:deliveryReceiptSubscription>
```

Note that this subscription example does not use the clientCorrelator but provides callbackData.

#### 5.13.5.1.2 Response

HTTP/1.1 201 Created

Content-Type: application/xml

Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B1555550151/subscriptions/sub000

Content-Length: nnnn

Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryReceiptSubscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL> http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <filterCriteria>0102</filterCriteria>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B1555550151/subscriptions/sub000</resourceURL>
</sms:deliveryReceiptSubscription>
```

Note that alternatively to returning a copy of the created resource, the location of created resource could be returned using the common:resourceReference root element (see section 5.7.5.2.2).

## 5.13.6 DELETE

Method not supported by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, POST’ field in the response as per section 14.7 of [RFC 2616].

## 5.14 Resource: Individual outbound SMS message delivery notification subscription

The resource used is:

**http://{serverRoot}/{apiVersion}/smsmessaging/outbound/{senderAddress}/subscriptions/{subscriptionId}**

This resource controls individual subscription for SMS delivery notification and gives access to individual subscription for a particular client.

### 5.14.1 Request URI variables

The following request URI variables are common for all HTTP commands:

Name	Description
serverRoot	server base url: hostname+port+base path. Example: http://example.com/exampleAPI
apiVersion	version of the ParlayREST API client wants to use (e.g. 1 for version 1.x)
senderAddress	identifies client application. Typically SMS SHORT CODE [OMA_REST_TS_Common]
subscriptionId	identifier of the subscription

### 5.14.2 HTTP Response Codes

#### 5.14.2.1 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

#### 5.14.2.2 Exception fault codes

For Policy Exception and Service Exception fault codes applicable to Short Messaging, see [3GPP 29.199-4].

### 5.14.3 GET

This operation is used to read an individual outbound SMS delivery notification subscription for the particular client.

#### 5.14.3.1 Example (Informative)

##### 5.14.3.1.1 Request

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000 HTTP/1.1
```

```
Accept: application/xml
```

```
Host: example.com
```

##### 5.14.3.1.2 Response

```
HTTP/1.1 200 OK
```

```
Content-Type: application/xml
```

Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryReceiptSubscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <filterCriteria>0102</filterCriteria>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000</resourceU
RL>
</sms:deliveryReceiptSubscription>
```

## 5.14.4 PUT

Method not supported by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.14.5 POST

Method not supported by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: GET, DELETE’ field in the response as per section 14.7 of [RFC 2616].

## 5.14.6 DELETE

This operation is used to delete a subscription for the particular client.

### 5.14.6.1 Example (Informative)

#### 5.14.6.1.1 Request

```
DELETE /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000 HTTP/1.1
Accept: application/xml
Host: example.com
```

#### 5.14.6.1.2 Response

HTTP/1.1 204 No Content  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

## 5.15 Resource: Client notification about outbound SMS message delivery status

This resource is a client provided callback URL for client notification about outbound message delivery status. ParlayREST does not make any assumption about the structure of this URL.

### 5.15.1 Request URI variables

Client provided.

## 5.15.2 HTTP Response Codes

For HTTP response codes, see [OMA\_REST\_TS\_Common].

### 5.15.3 GET

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: POST’ field in the response as per section 14.7 of [RFC 2616].

### 5.15.4 PUT

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: POST’ field in the response as per section 14.7 of [RFC 2616].

### 5.15.5 POST

This operation is used to notify the client about message delivery status.

#### 5.15.5.1 Example

(Informative)

##### 5.15.5.1.1 Request

```
POST /notifications/DeliveryInfoNotification HTTP/1.1
Accept: application/xml
Content-Type: application/xml
Content-Length: nnnn
Host: application.example.com

<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryInfoNotification xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackData>12345</callbackData>
  <deliveryInfo>
    <address>tel:+15555550101</address>
    <deliveryStatus>DeliveredToNetwork</deliveryStatus>
  </deliveryInfo>
  <link rel="DeliveryReceiptSubscription"
    href="http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000"/>
</sms:deliveryInfoNotification>
```

##### 5.15.5.1.2 Response

```
HTTP/1.1 204 No Content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## 5.15.6 DELETE

Method not allowed by the resource. The returned HTTP error status is 405. The server should also include the ‘Allow: POST’ field in the response as per section 14.7 of [RFC 2616].

## Appendix A. Change History (Informative)

### A.1 Approved Version History

Reference	Date	Description
OMA-TS-ParlayREST_ShortMessaging-V1_1-20120724-A	24 Jul 2012	Status changed to Approved by TP Ref TP Doc# OMA-TP-2012-0280-INP_ParlayREST_2_0_for_Final_Approval

## Appendix B. Static Conformance Requirements (Normative)

The notation used in this appendix is specified in [SCRRULES].

### B.1 SCR for ParlayREST.SMS Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-SUPPORT-S-001-M	Support for the SMS REST API	5	
PARLAYREST-SMS-SUPPORT-S-002-M	Support for the XML request & response format	5	
PARLAYREST-SMS-SUPPORT-S-003-M	Support for the JSON request & response format	5	
PARLAYREST-SMS-SUPPORT-S-004-O	Support for the application/form-urlencoded format	Appendix C	

#### B.1.1 SCR for ParlayREST.SMS.Inbound.Registration Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-INB-OFF-S-001-M	Support for reliable inbound message delivery	5.4	
PARLAYREST-SMS-INB-OFF-S-002-M	Retrieve messages from server - GET	5.4.3	

#### B.1.2 SCR for ParlayREST.SMS.Inbound.Registration.RetrieveDelete Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-INB-OFF-RETDEL-S-001-O	Support for inbound message delivery	5.5	PARLAYREST-SMS-INB-OFF-RETDEL-S-002-O
PARLAYREST-SMS-INB-OFF- RETDEL-S-002-O	Retrieve messages from server - POST	5.5.5	

#### B.1.3 SCR for ParlayREST.SMS.Individual.Inbound Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-IND-INB-S-001-M	Support for inbound individual message delivery	5.6	
PARLAYREST-SMS-IND-INB-S-002-O	Retrieve one message from server - GET	5.6.3	
PARLAYREST-SMS-IND-INB-S-003-M	Confirm and delete retrieved message from server - DELETE	5.6.6	

### B.1.4 SCR for ParlayREST.SMS.Inbound.Subscr Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-INB-ONL-SUBSCR-S-001-M	Support inbound subscriptions	5.7	
PARLAYREST-SMS-INB-ONL-SUBSCR-S-002-O	Read active subscriptions - GET	5.7.3	
PARLAYREST-SMS-INB-ONL-SUBSCR-S-003-M	Create inbound message subscription - POST (XML or JSON)	5.7.5	
PARLAYREST-SMS-INB-ONL-SUBSCR-S-004-O	Create inbound message subscription – POST (www-form-urlencoded)	C.3	

### B.1.5 SCR for ParlayREST.SMS.Inbound.Individual.Subscr Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-INB-INDON-SUBSCR-S-001-M	Support for control and read access to individual inbound subscription	5.8	
PARLAYREST-SMS-INB-INDON-SUBSCR-S-002-O	Read individual inbound subscription - GET	5.8.3	
PARLAYREST-SMS-INB-INDON-SUBSCR-S-003-M	Update individual inbound subscriptions - DELETE	5.8.6	

### B.1.6 SCR for ParlayREST.SMS.Inbound.Notifications Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-INB-NOTIF-S-001-M	Support for notifying application about inbound messages	5.9	
PARLAYREST-SMS-INB-NOTIF-S-002-M	Notify application about inbound message arrival - POST	5.9.5	

### B.1.7 SCR for ParlayREST.SMS.Outbound Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-OUTB-S-001-M	Support for outbound SMS messages	5.10	
PARLAYREST-SMS-OUTB-S-002-O	Retrieve list of pending outgoing message requests - GET	5.10.3	
PARLAYREST-SMS-	Create outgoing	5.10.5	

Item	Function	Reference	Requirement
OUTB-S-003-M	message request - POST (XML and JSON)		
PARLAYREST-SMS-OUTB-S-004-O	Create outgoing message request - POST (www-form-urlencoded)	C.1	

### B.1.8 SCR for ParlayREST.SMS.Outbound.MsgAndDeliveryStatus Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-OUTB-MSGDELSTAT-S-001-O	Support for requesting an outbound SMS message and its delivery status	5.11	PARLAYREST-SMS-OUTB-MSGDELSTAT-S-002-O
PARLAYREST-SMS-OUTB-MSGDELSTAT-S-002-O	Retrieve Outgoing Message Delivery Status - GET	5.11.3	

### B.1.9 SCR for ParlayREST.SMS.Outbound.DeliveryStatus Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-OUTB-DELSTAT-S-001-M	Support for requesting delivery status of outbound SMS messages	5.12	
PARLAYREST-SMS-OUTB-DELSTAT-S-002-M	Retrieve Outgoing Message Delivery Status - GET	5.12.3	

### B.1.10 SCR for ParlayREST.SMS.Outbound.Subscriptions Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-OUTB-SUBSCR-S-001-M	Support for outbound subscriptions for a particular client	5.13	
PARLAYREST-SMS-OUTB-SUBSCR-S-002-O	Read all outbound SMS delivery notification subscriptions - GET	5.13.3	
PARLAYREST-SMS-OUTB-SUBSCR-S-003-M	Create new outbound message subscription – POST (XML and JSON)	5.13.5	
PARLAYREST-SMS-OUTB-SUBSCR-S-004-O	Create new outbound message subscription – POST (www-form-urlencoded)	C.2	

### B.1.11 SCR for ParlayREST.SMS.Individual.Outbound.Subscr Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-IND-OUTB-IND-SUBSCR-S-001-M	Support for outbound subscriptions for a particular client	5.14	
PARLAYREST-SMS-IND-OUTB-IND-SUBSCR-S-002-O	Read individual SMS delivery notification subscription - GET	5.14.3	
PARLAYREST-SMS-IND-OUTB-IND-SUBSCR-S-003-M	Delete subscription for the client - DELETE	5.14.6	

### B.1.12 SCR for ParlayREST.SMS.Outbound.DeliveryStatus.Notifications Server

Item	Function	Reference	Requirement
PARLAYREST-SMS-OUTB-DELSTAT-NOTIF-S-001-M	Support for notifying application about delivery status of outbound messages	5.15	
PARLAYREST-SMS-OUTB-DELSTAT-NOTIF-S-002-M	Notify application about delivery status of outbound message - POST	5.15.5	

## Appendix C. Application/x-www-form-urlencoded Request Format for Selected REST Operations (Normative)

This section defines a format for SMS REST API requests where the body of the request is encoded using the application/x-www-form-urlencoded MIME type.

Note: only the request body is encoded as application/x-www-form-urlencoded, the response is still encoded as XML or JSON depending on the preference of the client and the capabilities of the server.

The following SMS REST operations are defined in this section:

- Sending a SMS to a terminal
- A mechanism to start the notification of delivery receipts
- A mechanism to start the notification of received SMS

### C.1 Send a SMS to a terminal

This operation is used to create an outgoing message request.

The request parameters are as follows:

Name	Type/Values	Optional	Description
address	xsd:anyURI	No	<p>One or more addresses to which the SMS will be sent.</p> <p>If the address is in the form of an MSISDN, it MUST include the protocol prefix 'tel' and '%3A%2B' followed by the country code before the subscriber number; e.g. tel%3A%2B1-555-555-0100.</p>
senderAddress	xsd:anyURI	No	<p>The address of the sender to whom a responding SMS may be sent.</p> <p>If the address is in the form of an MSISDN, it MUST include the protocol prefix 'tel' and '%3A%2B' followed by the country code before the subscriber number; e.g. tel%3A%2B1-555-555-0100.</p> <p>If senderAddress is also part of the request URL, the two MUST have the same value.</p>
message	xsd:string	No	The message to be sent
notifyURL	xsd:anyURI	Yes	URL to notify the application for delivery receipts
callbackData	xsd:string	Yes	Data the application can register with the server when subscribing to notifications, and that are passed back unchanged in each of the related notifications.
notificationFormat	common:NotificationFormat	Yes	<p>Default: XML</p> <p>Application can specify format of the resource representation in notifications that are related to this subscription. The choice is between {XML, JSON}</p>
clientCorrelator	xsd:string	Yes	A correlator that the client SHOULD use to tag this

			particular resource representation during a request to create a resource on the server. In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In case the field is not present, the server SHALL NOT generate it.
senderName	xsd:string	Yes	Name of the sender to appear on the terminal
chargingDescription	xsd:string [0..unbounded]	Yes	Description of charge to apply to this message. In case charging is required, this parameter MUST be present.
chargingCurrency	xsd:string	Yes	Currency of charge to apply to this message. In case chargingDescription is not present, this parameter MUST NOT be present.
chargingAmount	xsd:decimal	Yes	Charging amount to apply to this message. In case chargingDescription is not present, this parameter MUST NOT be present.
chargingCode	xsd:string	Yes	Charging code to apply to this message. In case chargingDescription is not present, this parameter MUST NOT be present.

## C.1.1 Example

(Informative)

### C.1.1.1 Request

```
POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
```

```
Host: example.com
```

```
Content-Type: application/x-www-form-urlencoded
```

```
Content-Length: nnnn
```

```
Accept: application/xml
```

```
address=tel%3A%2B15555550101&
address=tel%3A%2B15555550104&
senderAddress=tel%3A%2B15555550151&
message=Example%20Text%20Message&
notifyURL=http://application.example.com/notifications/DeliveryInfoNotification&
notificationFormat=XML&
clientCorrelator=67893&
senderName=MyName
```

### C.1.1.2 Response

```
HTTP/1.1 201 Created
```

```
Content-Type: application/xml
```

```
Content-Length: nnnn
```

```
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000
```

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:outboundSMSMessageRequest xmlns:sms="urn:oma:xml:rest:sms:1">
  <address>tel:+15555550101</address>
  <address>tel:+15555550104</address>
```

```

<senderAddress>tel:+15555550151</senderAddress>
<receiptRequest>
  <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
  <notificationFormat>XML</notificationFormat>
</receiptRequest>
<outboundSMSTextMessage>
  <message>Example Text Message</message>
</outboundSMSTextMessage>
<clientCorrelator>67893</clientCorrelator>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000</resourceURL>
</sms:outboundSMSMessageRequest>

```

## C.2 Start delivery receipt notification

This REST method is used by the application to start the delivery receipt notifications. It MUST use the HTTP POST method.

The following parameters are defined:

Name	Type/Values	Optional	Description
filterCriteria	xsd:string	No	Provides flexibility for the application to filter on, for example, the first 4 digits of MSISDN)
notifyURL	xsd:anyURI	No	Notification endpoint definition
callbackData	xsd:string	Yes	Data the application can register with the server when subscribing to notifications, and that are passed back unchanged in each of the related notifications.
notificationFormat	common:NotificationFormat	Yes	Default: XML Application can specify format of the resource representation in notifications that are related to this subscription. The choice is between {XML, JSON}
clientCorrelator	xsd:string	Yes	A correlator that the client MAY use to tag this particular resource representation during a request to create a resource on the server. In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In case the field is not present, the server SHALL NOT generate it.

If the operation was successful, it returns an HTTP Status of “201 Created”.

### C.2.1 Example

(Informative)

#### C.2.1.1 Request

```

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions HTTP/1.1
Host: example.com
Content-Type: application/x-www-form-urlencoded

```

```
Content-Length: nnnn
Accept: application/xml

filterCriteria=0102&
notifyURL=http://application.example.com/notifications/DeliveryInfoNotification&
callbackData=12345
```

### C.2.1.2 Response

HTTP/1.1 201 Created  
Content-Type: application/xml  
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B1555550151/subscriptions/sub000  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
<?xml version="1.0" encoding="UTF-8"?>
<sms:deliveryReceiptSubscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <filterCriteria>0102</filterCriteria>
<resourceURL>http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B1555550151/subscriptions/sub000</resource
URL>
</sms:deliveryReceiptSubscription>
```

## C.3 Start SMS notification

This REST method is used by the application to start the notification of received SMS. It MUST use the HTTP POST method.

The following parameters are defined:

Name	Type/Values	Optional	Description
destinationAddress	xsd:anyURI [1..unbounded]	No	Destination address of SMS
criteria	xsd:string	Yes	The text to match against to determine the application to receive the notification
notifyURL	xsd:anyURI	No	Notification endpoint definition
callbackData	xsd:string	Yes	Data the application can register with the server when subscribing to notifications, and that are passed back unchanged in each of the related notifications.
notificationFormat	common:NotificationFormat	Yes	Default: XML  Application can specify format of the resource representation in notifications that are related to this subscription. The choice is between {XML, JSON}
clientCorrelator	xsd:string	Yes	A correlator that the client MAY use to tag this particular resource representation during a request to

		create a resource on the server. In case the field is present, the server SHALL not alter its value, and SHALL provide it as part of the representation of this resource. In case the field is not present, the server SHALL NOT generate it.
--	--	---

This operation returns a result indicating whether the operation has been successful.

## C.3.1 Example

(Informative)

### C.3.1.1 Request

Note that this example also illustrates the use of “callbackData”.

```
POST /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1
Host: example.com
Content-Type: application/x-www-form-urlencoded
Content-Length: nnnn
Accept: application/xml

destinationAddress=tel%3A%2B15555550120&
criteria=Urgent&
notifyURL=http://application.example.com/notifications/DeliveryInfoNotification&
callbackData=12345
```

### C.3.1.2 Response

```
HTTP/1.1 201 Created
Content-Type: application/xml
Location: http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

<?xml version="1.0" encoding="UTF-8"?>
<sms:subscription xmlns:sms="urn:oma:xml:rest:sms:1">
  <callbackReference>
    <notifyURL>http://application.example.com/notifications/DeliveryInfoNotification</notifyURL>
    <callbackData>12345</callbackData>
  </callbackReference>
  <destinationAddress>tel:+15555550120</destinationAddress>
  <criteria>Urgent</criteria>
  <resourceURL>http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001</resourceURL>
</sms:subscription>
```

## Appendix D. JSON examples (Informative)

JSON (JavaScript Object Notation) is a lightweight, text-based, language-independent data interchange format. It provides a simple means to represent basic name-value pairs, arrays and objects. JSON is relatively trivial to parse and evaluate using standard JavaScript libraries, and hence is suited for Parlay REST invocations from browsers or other processors with JavaScript engines. Further information on JSON can be found at [RFC 4627].

The following examples show the request and response for various operations using a JSON binding. The examples follow the XML to JSON serialization rules in [OMA\_REST\_TS\_Common]. A JSON response can be obtained by using the content type negotiation mechanism specified in [OMA\_REST\_TS\_Common].

For full details on the operations themselves please refer to the section number indicated.

### D.1 Inbound message delivery (section 5.4.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=2 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

{"inboundSMSMessageList": {
    "inboundSMSMessage": [
        {
            "dateTime": "2009-11-19T12:00:00",
            "destinationAddress": "tel:+15555550120",
            "message": "First simple message",
            "messageId": "msg001",
            "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001\n",
            "senderAddress": "tel:+15555550121"
        },
        {
            "dateTime": "2009-11-19T12:00:00",
            "destinationAddress": "tel:+15555550122",
            "message": "Second simple message",
            "messageId": "msg002",
            "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg002\n",
            "senderAddress": "tel:+15555550123"
        }
    ],
    "numberOfMessagesInThisBatch": "2",
    "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages",
    "totalNumberOfPendingMessages": "20"
}}
```

## D.2 maxBatchSize exceeding the allowed size (section 5.4.3.2)

Request:

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=5000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
{"requestError": {
  "link": {
    "href": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages?maxBatchSize=5000",
    "rel": "InboundSMSMessageList"
  },
  "policyException": {
    "messageId": "POL0001",
    "text": "A policy error occurred. Error code is maxBatchSize exceeded. The maximum allowed maxBatchSize is %1.",
    "variables": "20"
  }
}}
```

## D.3 Retrieve and delete using registration (section 5.5.5.1)

Request:

```
POST /exampleAPI/1/smsmessaging/inbound/registrations/reg000/retrieveAndDeleteMessages HTTP/1.1
Accept: application/json
Content-Length: nnnn
Content-Type: application/json
Host: example.com
```

```
{"inboundSMSMessageRetrieveAndDeleteRequest": {
  "maxBatchSize": "3",
  "retrievalOrder": "OldestFirst"
}}
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
{"inboundSMSMessageList": {
  "inboundSMSMessage": [
    {
      "destinationAddress": "tel:+15555550120",
```

```

    "message": "First simple message",
    "messageld": "msg001",
    "senderAddress": "tel:+15555550121"
},
{
    "destinationAddress": "tel:+15555550122",
    "message": "Second simple message",
    "messageld": "msg002",
    "senderAddress": "tel:+15555550123"
}
],
"numberOfMessagesInThisBatch": "2",
"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000",
"totalNumberOfPendingMessages": "200"
}}

```

## D.4 Inbound messages for a given registration (section 5.6.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001?resFormat=JSON HTTP/1.1
Host: example.com
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
{"inboundSMSMessage": {
    "dateTime": "2009-11-19T12:00:00",
    "destinationAddress": "tel:+15555550120",
    "message": "First simple message",
    "messageld": "msg001",
    "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001\n",
    "senderAddress": "tel:+15555550121"
}}
```

## D.5 Invalid (non-existing) messageld (section 5.6.3.2)

Request:

```
GET /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 404 Not Found
```

Content-Type: application/json  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"requestError": {
  "link": {
    "href": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001",
    "rel": "InboundSMSMessage"
  },
  "serviceException": {
    "messageId": "SVC0002",
    "text": "Invalid input value. The requested messageId %1 does not exist.",
    "variables": "msg001"
  }
}}
```

## D.6 Remove message from gateway storage (section 5.6.6.1)

Request:

DELETE /exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001 HTTP/1.1  
 Accept: application/json  
 Host: example.com

Response:

HTTP/1.1 204 No content  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

## D.7 Read active subscriptions (section 5.7.3.1)

Request:

GET /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1  
 Accept: application/json  
 Host: example.com

Response:

HTTP/1.1 200 OK  
 Content-Type: application/json  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"subscriptionList": {
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions",
  "subscription": [
    {
      "callbackReference": {
        "callbackData": "12345",
        "callbackType": "SMS"
      }
    }
  ]
}}
```

```

    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
},
"criteria": "Urgent",
"destinationAddress": "tel:+15555550120",
"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001"
},
{
  "callbackReference": {
    "callbackData": "54321",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "criteria": "Urgent",
  "destinationAddress": "tel:+15555550121",
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub002"
}
]
}
}

```

## D.8 Create new message subscription (section 5.7.5.1)

Request:

POST /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1

Accept: application/json

Content-Type: application/json

Content-Length: nnnn

Host: example.com

```
{"subscription": {
  "callbackReference": {
    "callbackData": "12345",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "criteria": "Urgent",
  "destinationAddress": "tel:+15555550120"
}}
```

Response:

HTTP/1.1 201 Created

Content-Type: application/json

Location: http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001

Content-Length: nnnn

Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"subscription": {
  "callbackReference": {
    "callbackData": "12345",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "criteria": "Urgent",
  "destinationAddress": "tel:+15555550120",
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001"
}}
```

```
}
```

## D.9 Returning the location of created resource (section 5.7.5.2)

Request:

```
POST /exampleAPI/1/smsmessaging/inbound/subscriptions HTTP/1.1
Accept: application/json
Content-Type: application/json
Content-Length: nnnn
Host: example.com

{"subscription": {
    "callbackReference": {
        "callbackData": "12345",
        "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
    },
    "criteria": "Urgent",
    "destinationAddress": "tel:+15555550120"
}}
```

Response:

```
HTTP/1.1 201 Created
Content-Type: application/json
Location: http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

{"resourceReference": {"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscriptions/sub001"}}
```

## D.10 Read individual subscription (section 5.8.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/inbound/subscriptions/sub000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

{"subscription": {
    "callbackReference": {
        "callbackData": "12345",
        "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
}}
```

```
},
"criteria": "Urgent",
"destinationAddress": "tel:+15555550120",
"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/subscription/sub001"}
```

## D.11 Delete a subscription (section 5.8.6.1)

Request:

```
DELETE /exampleAPI/1/smsmessaging/inbound/subscriptions/sub000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 204 No content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## D.12 Notify client about message arrival (section 5.9.5.1)

Request:

```
POST /notifications/DeliveryInfoNotification HTTP/1.1
Accept: application/json
Content-Type: application/json
Content-Length: nnnn
Host: application.example.com

{"inboundSMSMessageNotification": {
    "callbackData": "12345",
    "inboundSMSMessage": {
        "dateTime": "2009-11-19T12:00:00",
        "destinationAddress": "tel:+15555550120",
        "message": "First simple message",
        "messageId": "msg001",
        "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/inbound/registrations/reg000/messages/msg001\n    ",
        "senderAddress": "tel:+15555550121"
    }
}}
```

Response:

```
HTTP/1.1 204 No Content
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## D.13 Retrieve list of pending outbound messages (section 5.10.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
{"outboundSMSMessageRequestList": {
  "outboundSMSMessageRequest": [
    {
      "address": "tel:+15555550101",
      "clientCorrelator": "67891",
      "deliveryInfoList": [
        {
          "deliveryInfo": {
            "address": "tel:+15555550101",
            "deliveryStatus": "DeliveredToNetwork"
          },
          "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req001/deliveryInfos"
        }
      ],
      "outboundSMSTextMessage": {"message": "Let's have a REST."},
      "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req001",
      "senderAddress": "tel:+15555550151"
    },
    {
      "address": [
        "tel:+15555550102",
        "tel:+15555550103"
      ],
      "clientCorrelator": "67892",
      "deliveryInfoList": [
        {
          "deliveryInfo": [
            {
              "address": "tel:+15555550102",
              "deliveryStatus": "DeliveredToTerminal"
            },
            {
              "address": "tel:+15555550103",
              "deliveryStatus": "DeliveredToNetwork"
            }
          ],
          "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req002/deliveryInfos"
        }
      ],
      "outboundSMSTextMessage": {"message": "Let's have a REST."},
      "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req002",
    }
  ]
}
```

```

        "senderAddress": "tel:+15555550151"
    }
],
"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests"
}
}

```

## D.14 Create outbound message, returning a representation of created resource (section 5.10.5.1)

Request:

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1

Accept: application/json

Content-Length: nnnn

Content-Type: application/json

Host: example.com

```
{"outboundSMSMessageRequest": {
    "address": [
        "tel:+15555550101",
        "tel:+15555550104"
    ],
    "clientCorrelator": "67893",
    "outboundSMSTextMessage": {"message": "Example Text Message "},
    "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
    "senderAddress": "tel:+15555550151",
    "senderName": "MyName"
}}
```

Response:

HTTP/1.1 201 Created

Content-Type: application/json

Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000

Content-Length: nnnn

Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"outboundSMSMessageRequest": {
    "address": [
        "tel:+15555550101",
        "tel:+15555550104"
    ],
    "clientCorrelator": "67893",
    "deliveryInfoList": {
        "deliveryInfo": [
            {
                "address": "tel:+15555550101",
                "deliveryStatus": "MessageWaiting"
            },
            {
                "address": "tel:+15555550104",
                "deliveryStatus": "MessageWaiting"
            }
        ]
    }
}}
```

```

        },
        ],
        "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos",
        },
        "outboundSMSTextMessage": {"message": "Example Text Message "},
        "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
        "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000",
        "senderAddress": "tel:+15555550151",
        "senderName": "MyName"
    }
}

```

## D.15 Create outbound message, returning the location of created resource (section 5.10.5.2)

Request:

```

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/json
Content-Type: application/json
Content-Length: nnnn
Host: example.com

{"outboundSMSMessageRequest": {
    "address": [
        "tel:+15555550101",
        "tel:+15555550104"
    ],
    "clientCorrelator": "67893",
    "outboundSMSTextMessage": {"message": "Example Text Message "},
    "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
    "senderAddress": "tel:+15555550151",
    "senderName": "MyName"
}}

```

Response:

```

HTTP/1.1 201 Created
Content-Type: application/json
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

{"resourceReference": {"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000"}}

```

## D.16 ServiceException in case of single address or all multiple addresses failure (section 5.10.5.3)

Request:

```

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1
Accept: application/json

```

Content-Type: application/json  
 Content-Length: nnnn  
 Host: example.com

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "senderAddress": "tel:+15555550151",
  "senderName": "MyName"
}}
```

Response:

HTTP/1.1 400 Bad Request  
 Content-Type: application/json  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"requestError": {"serviceException": {
  "messageId": "SVC0001",
  "text": "A service error occurred. Error code is %1",
  "variables": "ERROR-XYZ"
}}}
```

## D.17 Multiple addresses partial success, with deliveryInfoList in response (section 5.10.5.4)

Request:

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1  
 Accept: application/json  
 Content-Type: application/json  
 Content-Length: nnnn  
 Host: example.com

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "senderAddress": "tel:+15555550151",
  "senderName": "MyName"
}}
```

Response:

HTTP/1.1 201 Created  
Content-Type: application/json  
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "deliveryInfoList": {
    "deliveryInfo": [
      {
        "address": "tel:+15555550101",
        "deliveryStatus": "MessageWaiting"
      },
      {
        "address": "tel:+15555550104",
        "deliveryStatus": "DeliveryImpossible"
      }
    ],
    "resourceURL":
    "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos"
  },
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000",
  "senderAddress": "tel:+15555550151",
  "senderName": "MyName"
}}
```

## D.18 Multiple addresses partial success, without deliveryInfoList in response (section 5.10.5.5)

Request:

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests HTTP/1.1  
Accept: application/json  
Content-Type: application/json  
Content-Length: nnnn  
Host: example.com

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "senderAddress": "tel:+15555550151",
```

```

    "senderName": "MyName"
}}
```

Response:

```

HTTP/1.1 201 Created
Content-Type: application/json
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT

```

```

{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000",
  "senderAddress": "tel:+15555550151",
  "senderName": "MyName"
}}
```

## D.19 Create outbound message using SHORT CODE as senderAddress, returning a representation of created resource (section 5.10.5.6)

Request:

```

POST /exampleAPI/1/smsmessaging/outbound/72654/requests HTTP/1.1
Accept: application/json
Content-Length: nnnn
Content-Type: application/json
Host: example.com

{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "senderAddress": "72654",
  "senderName": "MyName"
}}
```

Response:

```

HTTP/1.1 201 Created
Content-Type: application/json
Location: http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000

```

Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "deliveryInfoList": {
    "deliveryInfo": [
      {
        "address": "tel:+15555550101",
        "deliveryStatus": "MessageWaiting"
      },
      {
        "address": "tel:+15555550104",
        "deliveryStatus": "MessageWaiting"
      }
    ],
    "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000/deliveryInfos"
  },
  "outboundSMSTextMessage": {"message": "Example Text Message"},
  "receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/72654/requests/req000",
  "senderAddress": "72654",
  "senderName": "MyName"
}}
```

## D.20 Get message delivery status (section 5.11.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

HTTP/1.1 200 OK  
 Content-Type: application/json  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"outboundSMSMessageRequest": {
  "address": [
    "tel:+15555550101",
    "tel:+15555550104"
  ],
  "clientCorrelator": "67893",
  "deliveryInfoList": {
    "deliveryInfo": [
```

```
{
  "address": "tel:+15555550101",
  "deliveryStatus": "MessageWaiting"
},
{
  "address": "tel:+15555550104",
  "deliveryStatus": "MessageWaiting"
}
],
"resourceURL":
"http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos"
},
"outboundSMSTextMessage": {"message": "\"sent message\""},
"receiptRequest": {"notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"},
"resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000",
"senderAddress": "tel:+15555550151",
"senderName": "MyName"
}}
```

## D.21 Get message delivery status (section 5.12.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

```
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: nnnn
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

```
{"deliveryInfoList": {
  "deliveryInfo": [
    {
      "address": "tel:+15555550101",
      "deliveryStatus": "MessageWaiting"
    },
    {
      "address": "tel:+15555550104",
      "deliveryStatus": "MessageWaiting"
    }
  ],
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/requests/req000/deliveryInfos"
}}
```

## D.22 Read delivery notification subscriptions (section 5.13.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions HTTP/1.1
Accept: application/json
```

Host: example.com

Response:

HTTP/1.1 200 OK  
Content-Type: application/json  
Content-Length: nnnn  
Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"deliveryReceiptSubscriptionList": {
  "deliveryReceiptSubscription": [
    {
      "callbackReference": {
        "callbackData": "12345",
        "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
      },
      "filterCriteria": "0102",
      "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000"
    },
    {
      "callbackReference": {
        "callbackData": "54321",
        "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
      },
      "filterCriteria": "0103",
      "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000"
    }
  ],
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/"
}}
```

## D.23 Create delivery notification subscription (section 5.13.5.1)

Request:

POST /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions HTTP/1.1

Accept: application/json

Content-Type: application/json

Content-Length: nnnn

Host: example.com

```
{"deliveryReceiptSubscription": {
  "callbackReference": {
    "callbackData": "12345",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "filterCriteria": "0102"
}}
```

Response:

HTTP/1.1 201 Created

Content-Type: application/json

Location: http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000

Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"deliveryReceiptSubscription": {
  "callbackReference": {
    "callbackData": "12345",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "filterCriteria": "0102",
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000"
}}
```

## D.24 Read delivery notification subscription (section 5.14.3.1)

Request:

```
GET /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

HTTP/1.1 200 OK  
 Content-Type: application/json  
 Content-Length: nnnn  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

```
{"deliveryReceiptSubscription": {
  "callbackReference": {
    "callbackData": "12345",
    "notifyURL": "http://application.example.com/notifications/DeliveryInfoNotification"
  },
  "filterCriteria": "0102",
  "resourceURL": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000"
}}
```

## D.25 Delete subscription for a client (section 5.14.6.1)

Request:

```
DELETE /exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000 HTTP/1.1
Accept: application/json
Host: example.com
```

Response:

HTTP/1.1 204 No Content  
 Date: Thu, 04 Jun 2009 02:51:59 GMT

## D.26 Notify client about message delivery status (section 5.15.5.1)

Request:

```
POST /notifications/DeliveryInfoNotification HTTP/1.1
```

```
Accept: application/json
```

```
Content-Type: application/json
```

```
Content-Length: nnnn
```

```
Host: application.example.com
```

```
{"deliveryInfoNotification": {  
    "callbackData": "12345",  
    "deliveryInfo": {  
        "address": "tel:+15555550101",  
        "deliveryStatus": "DeliveredToNetwork"  
    },  
    "link": {  
        "href": "http://example.com/exampleAPI/1/smsmessaging/outbound/tel%3A%2B15555550151/subscriptions/sub000",  
        "rel": "DeliveryReceiptSubscription"  
    }  
}}
```

Response:

```
HTTP/1.1 204 No Content
```

```
Date: Thu, 04 Jun 2009 02:51:59 GMT
```

## Appendix E. Parlay X operations mapping (Informative)

The table below illustrates the mapping between REST resources/methods and Parlay X equivalent operations.

ParlayREST Resource	ParlayREST Method	ParlayREST Section reference	Parlay X equivalent operation
Inbound SMS message requests for a given registration	GET	5.4.3	getReceivedSms <sup>1</sup>
Inbound SMS messages Retrieve and Delete using registration	POST	5.5.5	getReceivedSms
Inbound SMS message subscriptions	POST	5.7.5	startSmsNotification
Individual inbound SMS message subscription	DELETE	5.8.6	stopSmsNotification
Client notification about inbound SMS message	POST	5.9.5	notifySMSReception
Outbound SMS message requests	POST	5.10.5	sendSmsRequest
Outbound SMS message delivery status	GET	5.12.3	getSmsDeliveryStatus
Outbound SMS message delivery notification subscriptions	POST	5.13.5	startDeliveryReceiptNotification
Individual outbound SMS message delivery notification subscription	DELETE	5.14.6	stopDeliveryReceiptNotification
Client notification about outbound SMS message delivery status	POST	5.15.5	notifySMSDeliveryReceipt

Table 1: Parlay X operations mapping

<sup>1</sup> Note: The ParlayX SOAP operation getReceivedSms is similar to but not quite the same as this ParlayREST method because DELETE of individual message is required for confirmation of successful retrieval (see DELETE on Inbound SMS message).